

# Agilent E1445A

## Arbitrary Function Generator

### Data Sheet

- 1-Slot, C-size, message based
- 13-bit resolution, 40 MSa/s
- 256 kSa waveform segment memory
- Waveform and frequency hopping with sweep function
- Direct access to high-speed registers
- Built-in self-test



Agilent E1445A

## Description

The Agilent E1445A Arbitrary Function Generator is a **C-size, 1-slot, message-based VXI module**. It provides the flexibility to produce virtually any waveform needed.

The deep memory allows downloading a large number of waveforms at once, and can store up to 128 waveforms using SCPI programming. The memory sequencer lets you link waveform segments together in any order. These sequences can be repeated 1 to 64 k times or continuously. Within a sequence, the segments can be repeated up to 4,096 times using only one sequence memory entry. This memory structure lets you build large, complex waveforms out of small segments.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

## Produce Complex Waveforms

Essentially, there are two memories built into the E1445A:

1. 256 kSa segment memory that supplies the digital-to-analog converter (DAC) with its output values; and
2. 32 k-segment sequence memory that defines how the segments are consecutively linked together at full speed.

The memory sequencer lets you link waveform segments together in any order. These sequences can be repeated 1 to 64 k times or continuously. Within a sequence, the segments can be repeated up to 4,096 times using only one sequence memory entry. This memory structure lets you build large, complex waveforms out of small segments.

## Precisely Control the Frequency

One of the clocks is created by the Direct Digital Synthesis (DDS) technique. With DDS, you get very high resolution. This allows you to precisely set the frequencies you need.

For signals with the lowest phase noise, crystal oscillators with divider circuits are also on-board to clock the DAC. This allows you to set values like 20 MSa/s with minimal jitter.

## Hop Frequencies


Frequency hopping is done easily by programming a list of frequencies and instructing the internal microprocessor to step through the list. As an added benefit, the frequency changes are phase continuous. Using this feature, you can produce bursts of several tones.

## Drive the DAC Directly

When you have an extremely long or indeterminate waveform, you can use the VXI Local Bus or the faceplate connector to drive the DAC directly. This lets your process define the waveform being produced by the E1445A. Local Bus speed is limited to 7.4 MSa/s typical. Neither is paced by the internal time base, they must be paced externally.

## Control and Synchronize Other Instruments

A programmable marker places a pulse on the Marker Out BNC. This marker can appear in any location in the segment memory. You can use the marker to synchronize other instruments, such as an oscilloscope or a digital functional tester.

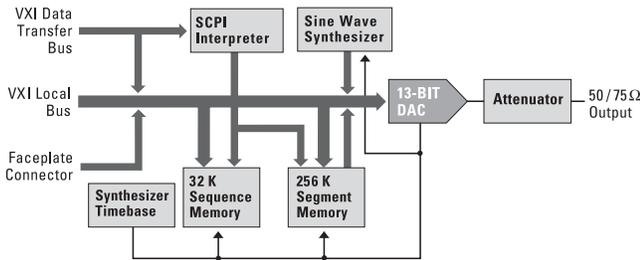

## Product Specifications

### Waveforms

<b>Arbitrary waveform function:</b>	Yes
<b>Standard waveforms:</b>	Sine, square, ramp, and triangle
<b>Resolution:</b>	13 bits (12 bits for sine)
<b>Sample rate generation method:</b>	Direct digital synthesis (DDS) or time base sources with digital dividers

#### Sample rate using DDS:\*

Mode:	Resolution	Range (Sa/s):
DDS normal	0.01 Sa/s	0.01 to 10.7 M
DDS doubled	0.02 Sa/s	0.02 to 21.4 M

\* Internal 42.94 MHz crystal

<b>Sample rate:</b>	(Resolution using non-DDS timebase) (time base frequency)/(divider), divider = 1, 2, 3, 2N (N = 1 to 64 k), max. 40 MSa/s
---------------------	---

<b>Waveform segment memory:</b>	256 kSa
<b>Maximum number of segments:</b>	256 using SCPI
<b>Sequence memory:</b>	32,768 segments
<b>Maximum number of waveforms in memory:</b>	128 using SCPI
<b>Waveform sequence looping (burst output mode):</b>	1 to 65,536 cycles or continuous
<b>Segment looping:</b>	1 to 4,096
<b>Waveform hopping:</b>	Programmed in memory or randomly using register access via VXI Data Transfer Bus (P1), VXI Local Bus (P2), or faceplate connector

<b>Modulation:</b>	FSK, PM
--------------------	---------

### Frequency Rates

<b>Sample rate:</b>	40 MSa/s
<b>Time base sources:</b>	Internal 40 MHz and 42.9 MHz crystals (50 ppm); VXI CLK10 line; VXI ECLTrig lines; faceplate BNC
<b>Maximum waveform frequency:</b>	10.7 MHz sine, 5 MHz square, 100 kHz ramp/triangle using 100 samples per cycle
<b>Sweep:</b>	Linear and log frequency
<b>Frequency sweep range:</b>	0.01 Hz to 10 MHz
<b>Frequency hop range:</b>	0.01 Hz to 10 MHz
<b>Frequency hop rate:</b>	Up to 500 kHz using registers, 800 Hz using SCPI
<b>Frequency shift (FSK) rate:</b>	Up to 2 M changes/s
<b>Phase modulation rate:</b>	Up to 500 kHz
<b>Phase modulation source:</b>	Software, VXI Local Bus (P2), or faceplate connector
<b>Square waveform rise time:</b>	17 ns typical

### Output

<b>Amplitude:</b>	± 10.2 V max. (open circuit)
<b>Output impedance (software selectable):</b>	50 or 75 Ω (output also calibrated for open circuit)
<b>Voltage amplitude range:</b>	± 5.1 V in 1.25 mV steps in 50 Ω, ± 10.2 V in 2.5 mV steps in to high impedance.
<b>Monotonicity:</b>	>11 bits
<b>Differential nonlinearity (dc):</b>	4 LSB
<b>Amplitude accuracy (dc):</b>	± (0.3% + 5 mV) into 50 Ω
<b>Output</b>	
<b>Maximum offset:</b>	± 5 V into 50 Ω
<b>Maximum output:</b>	± 5.5 V AC+DC into 50 Ω
<b>Amplitude accuracy (ac):</b>	± (0.1 dB + attenuator error + ac flatness) (Absolute)

**Sine total harmonic distortion with internal filters applied:**

Frequency Range	Harmonic Level
0.1 - 250 kHz	-60 dBc
0.25 - 4 MHz	-60 dBc + 20 log (f/250 k)
4 MHz - 10 MHz	-36 dBc

**Note: f = output frequency**

**Sine spurious nonharmonic distortion:**

Frequency Range	Non-harmonic Level
10 Hz - 1 MHz	-60 dBc or -60 dBm, (whichever is greater)
1 MHz - 4 MHz	-50 dBc
4 MHz - 10 MHz	-45 dBc

#### AC flatness:

##### Frequency Range Flatness

0.1 Hz - 100 kHz	0.05 dB
100 - 250 kHz	0.1 dB
1 kHz - 10 MHz	0.2 dB

*Note: relative to 1 kHz with internal filters*

<b>Attenuator range:</b>	0 to 30 dB in 0.01 steps
<b>Attenuator error:</b>	0 dB at max output level, 0.05 dB at other levels
<b>Output filters (software selectable):</b>	250 kHz, 5-pole Bessel; 10 MHz, 7-pole Bessel; no filter applied

#### Auxiliary Input/Output

<b>VXI Local Bus:</b>	Data to DAC ( <b>not</b> synchronized to time base and limited to 7.4 MSa/s typical), data to segment memory, waveform selection, phase modulation
<b>Trigger sources:</b>	Auto, hold, software, VXI TTLTRG, VXI ECLTRG, or faceplate BNC

#### Faceplate Connectors

<b>Ref/sample in BNC:</b>	Frequency reference, sample clock
<b>Start arm in BNC:</b>	Start arm
<b>Stop trig/FSK/gate in BNC:</b>	Trigger clock gate, Trigger stop, FSK
<b>Marker out:</b>	Any point, start of sequence, sample clock, reference frequency, frequency/phase change
<b>Digital port:</b>	Data to DAC or segment memory, waveform selection, phase modulation
<b>VXI TTLTRG lines:</b>	Sample clock, gate, sweep arm/trigger, FSK input
<b>VXI ECLTRG lines:</b>	Sample clock, reference frequency, start arm, all marker outputs

#### General Specifications

##### VXI Characteristics

<b>VXI device type:</b>	Message based
<b>Data transfer bus:</b>	A16, A32, D8/16/32 slave only
<b>Size:</b>	C
<b>Slots:</b>	1
<b>Connectors:</b>	P1/2
<b>Shared memory:</b>	None
<b>VXI busses:</b>	Local Bus A-row, Local Bus C-row, TTL Trigger Bus, ECL Trigger Bus
<b>C-size compatibility:</b>	n/a

#### Instrument Drivers

See the Agilent Technologies Website ([http://www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)) for driver availability and downloading.

<b>Command module firmware:</b>	n/a
<b>Command module firmware rev:</b>	n/a
<b>I-SCPI Win 3.1:</b>	n/a
<b>I-SCPI Series 700:</b>	n/a
<b>C-SCPI LynxOS:</b>	n/a
<b>C-SCPI Series 700:</b>	n/a
<b>Panel Drivers:</b>	Yes
<b>VXIplug&amp;play Win Framework:</b>	No
<b>VXIplug&amp;play Win 95/NT Framework:</b>	Yes
<b>VXIplug&amp;play HP-UX Framework:</b>	No

#### Module Current

	$I_{PM}$	$I_{DM}$
+5 V:	3.5	0.2
+12 V:	0.1	0.1
-12 V:	0.13	0.06
+24 V:	0.22	0.17
-24 V:	0.34	0.17
-5.2 V:	2.5	0.12
-2 V:	1.2	0.2

#### Cooling/Slot

<b>Watts/slot:</b>	44.00
<b><math>\Delta P</math> mm H<sub>2</sub>O:</b>	0.50
<b>Air Flow liter/s:</b>	3.50

#### Ordering Information

Description	Product No.
C-Size Arbitrary Function Generator	E1445A
Service Manual	E1445A 0B3
Germany - German Localization	E1445A ABD
France - French Localization	E1445A ABF
Japan - Japanese Localization	E1445A ABJ
Backplane Connector Shield Kit	E1400-80920

## **Agilent Technologies' Test and Measurement Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### **Our Promise**

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly, and help with initial product operation.

### **Your Advantage**

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



### **Agilent Email Updates**

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.

### **Agilent T&M Software and Connectivity**

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections.

Visit [www.agilent.com/find/connectivity](http://www.agilent.com/find/connectivity) for more information.

For more assistance with all your test and measurement needs or to find your local Agilent office go to [www.agilent.com/find/assist](http://www.agilent.com/find/assist)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2005  
Printed in the USA May 1, 2005  
5965-5542E



**Agilent Technologies**