




Agilent Waveguide Power Sensors

Data Sheet

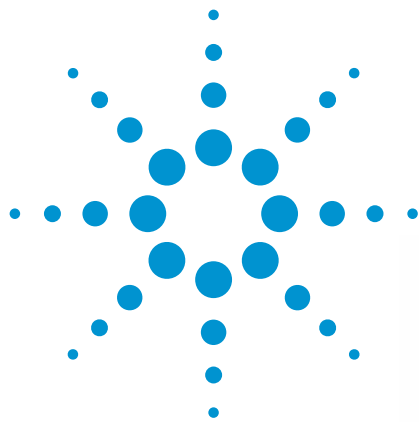

Make accurate and reliable measurements in the 50 to 110 GHz frequency range with Agilent's family of waveguide power sensors.

Covering the V-band, E-band and W-band spectrums, Agilent's waveguide power sensors offer best SWR, high reliability and low loss, and come with a 50 MHz calibration port to reduce measurement uncertainties. And with the Agilent E8486A (Option 200) waveguide sensor, you also get a wide dynamic range spanning from -60 dBm to +20 dBm.

Compatible with Your Current Agilent Power Meter

Agilent waveguide power sensors are fully compatible with Agilent EPM (E4418B/19B, N1913A/14A), EPM-P (E4416A/17A) and P-Series (N1911A/12A) power meters. The V8486A and W8486A are also compatible with the discontinued or obsolete power meters such as 435B, 436A, 437B, 438A, 70100A, E1416A, E4418A, and E4419A power meters.

Best SWR Available

In RF and microwave power measurements, the largest single source of error is usually sensor and source mismatch. To minimize any measurement uncertainty caused by mismatch, Agilent waveguide sensors offer excellent SWR of 1.06 (>30 dB return loss).

50 MHz Calibration

For easy calibration with the power meter, Agilent waveguide power sensors incorporate a 50 MHz calibration port. This eliminates the variance in making measurements with different meter/sensor combinations and the uncertainties due to temperature changes. It also provides traceability to the U.S National Institute of Standards and Technology (NIST) at millimeter-wave frequencies.

High Reliability

Agilent waveguide sensors use the same proven Modified Barrier Integrated Diode (MBID) technology found in other Agilent sensors, and always operates in the square-law characteristic for true-average detection.



Waveguide power sensors comparison table

Model	Frequency range	Power linearity ¹	Maximum power	Connector type
E8486A-100	60 GHz to 90 GHz	-30 to +10 dBm: $<\pm 1\%$ +10 to +20 dBm: $<\pm 2\%$ ² +10 to +20 dBm: $<+1, -3\%$ ³	200 mW avg, 40 W pk (10.µs per pulse, 0.5% duty cycle)	Waveguide flange: UG-387/U Flange, EIA WR-12
E8486A-200	60 GHz to 90 GHz	-60 to -30 dBm: $<\pm 1.5\%$ -30 to +10 dBm: $<\pm 1\%$ +10 to +20 dBm: $<1.5\%$	200 mW avg, 1 W pk (10.µs per pulse, 0.5% duty cycle)	Waveguide flange: UG-387/U Flange, EIA WR-12
V8486A	50 GHz to 75 GHz	-30 dBm to +10 dBm: $(\pm 1\%)$ +10 dBm to +20 dBm: $(\pm 2\%)$	200 mW avg, 40 W pk (10.µs per pulse, 0.5% duty cycle)	Waveguide flange: UG-385/U
W8486A	75 GHz to 110 GHz	$\pm 2\%$	200 mW avg, 40 W pk (10.µs per pulse, 0.5% duty cycle)	Waveguide flange: UG-387/U

1. Negligible deviation except for those power ranges noted.

2. For EPM series power meters

3. For all other Agilent power meters

E8486A E-Band Waveguide Power Sensor



Figure 1: E8486A-100 comes without built-in EEPROM. Users need to pre-enter calibration factors printed on the back of the sensor into the power meter.



Figure 2: E8486A-200 comes with built-in EEPROM to store calibration factors.

Meet the rapid demand in E-band telecommunication applications with the E8486A waveguide power sensor. Designed with a WR-12 flange connector, the E8486A makes precise and direct waveguide measurements in the E-band frequency range and is compatible with most Agilent power meters. A wide dynamic range of -60 to +20 dBm and a SWR performance of 1.06 minimize measurement uncertainty caused by mismatch, providing high accuracy even with low power signals. With the E8486A waveguide power sensor, get the precision and accuracy you need for E-band applications in a single power sensor.

Specifications

Power Range	Option 100: 1 μ W to 100 mW (-30 to +20 dBm) Option 200: 1 nW to 100 mW (-60 to +20 dBm)
Frequency Range	60 to 90 GHz
Calibration Factor Input	Option 100: Does not include EEPROM. Users need to pre-enter calibration factors into the power meter; the calibration factor label will be provided on the power sensor unit. Option 200: Comes with EEPROM to store calibration factors. Users simply need to input the frequency and the correct calibration factor will be applied.
Maximum SWR	Option 100: <1.06 Option 200: <1.28
Maximum SWR @ 50MHz	Option 100: < 1.066 Option 200: < 1.077
Maximum Power (Damage Level)	Option 100: 200 mW avg, 40 W pk (10 μ s per pulse, 0.5% duty cycle) Option 200: 200 mW avg, 1 W pk (10 μ s per pulse, 0.5% duty cycle)
Power Linearity	Option 100: -30 to +10 dBm: < $\pm$ 1% +10 to +20 dBm: < $\pm$ 2% ¹ +10 to +20 dBm: <+1, -3% ² Option 200: -60 to -30 dBm: < $\pm$ 1.5% -30 to +10 dBm: < $\pm$ 1% +10 to +20 dBm: <1.5%
Zero Set	Option 100: < $\pm$ 200 nW Option 200: < $\pm$ 200 pW
Measurement Noise	Option 100: <450 nW Option 200: <450 pW
Zero Drift	Option 100: < $\pm$ 40 nW Option 200: < $\pm$ 40 pW
Connector Type	50 MHz calibration port: Type N (male), 50 Ω nominal impedance Waveguide flange: UG-387/U Flange, EIA WR-12
Net Weight	Net: 0.4 kg (0.9 lb) Shipping: 1 kg (2.2 lb)
Dimensions	38 mm (w) x 199 mm (l) x 60 mm (h)

1. For EPM series power meters

2. For all other Agilent power meters

V8486A V-Band Waveguide Power Sensor



Figure 3: V8486A comes without built-in EEPROM. Users need to pre-enter calibration factors printed on the back of the sensor into the power meter.

Make accurate average power measurements from 50 to 75 GHz with the V8486A V-band power sensor.

Specifications

Power Range	-30 to +20 dBm
Frequency Range	50 GHz to 75 GHz
Maximum SWR	<1.06
Maximum SWR @ 50 MHz	< 1.073
Maximum Power (waveguide port only)	200 mW average, 40 W peak (10 μ s pulse, 0.5% duty cycle) or equivalent such that 200 mW maximum average power and 40 W peak power are not exceeded).
Power Linearity	-30 to +10 dBm: $\leq \pm 1\%$ +10 to +20 dBm: $\pm 2\%$ (for EPM series power meters) +10 to +20 dBm: +1, -3% (for all other Agilent power meters)
Zero Set	$\leq \pm 200$ nW
Measurement Noise	<450 nW
Zero Drift	$\leq \pm 40$ pW
Weight	Net: 0.4 kg (0.9 lb) Shipping: 1.0 kg (2.2 lb)
Connector Type	EIA WR-15, UG-385/U
Equivalent Waveguide Band Designators to EIA WR-15	IEC R-620 British WG-25 JAN RG-273 MIL-W-85/3-018
Equivalent Flange Designator to UG-385/U	MIL-F-3922/67B-002

A special option for the V8486A that extends the power range down to -60 dBm is available. Contact your local Agilent field engineer or sales office for more information.

W8486A W-Band Waveguide Power Sensor



Figure 4: W8486A comes without built-in EEPROM. Users need to pre-enter calibration factors printed on the back of the sensor into the power meter.

The W8486A waveguide power sensor measures average power over the frequency range 75 GHz to 110 GHz and power range -30 dBm to +20 dBm.

Specifications

Power Range	-30 to +20 dBm
Frequency Range	75 GHz to 110 GHz
Maximum SWR	<1.08
Maximum SWR @ 50 MHz	< 1.076
Maximum Power (waveguide port only)	200 mW average, 40 W peak (10 μs pulse, 0.5% duty cycle) or equivalent such that 200 mW maximum average power and 40 W peak power are not exceeded).
Power Linearity	(±2%)
Zero Set	<±200 nW
Measurement Noise	<450 nW
Zero Drift	<±40 pW
Weight	Net: 0.4 kg (0.9 lb) Shipping: 1.0 kg (2.2 lb)
Connector Type	Waveguide flange: UG-387/U

Ordering Information

	Model	Description
<i>E-Band</i>	<i>E8486A-100</i>	<i>E-band power sensor, 60 to 90 GHz, -30 to +20 dBm</i>
	<i>E8486A-200</i>	<i>E-band power sensor, 60 to 90 GHz, -60 to +20 dBm</i>
	<i>E8486A-201</i>	<i>E-band power sensor, 54 to 95 GHz, -60 to +20 dBm</i>
<i>V-Band</i>	<i>V8486A</i>	<i>V-band power sensor, 50 to 75 GHz, -30 to +20 dBm</i>
<i>W-Band</i>	<i>W8486A</i>	<i>W-band power sensor, 75 to 110 GHz, -30 to +20 dBm</i>

Standard shipped accessories

- Hex ball driver
- Waveguide mounting screws
- User's and Service Guide, English

Calibration cycle

- 1 year



myAgilent

www.agilent.com/find/myagilent

A personalized view into the information most relevant to you.



AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.agilent.com/find/ThreeYearWarranty

Beyond product specification, changing the ownership experience. Agilent is the only test and measurement company that offers three-year warranty on all instruments, worldwide.



Agilent Assurance Plans

www.agilent.com/find/AssurancePlans

Five years of protection and no budgetary surprises to ensure your instruments are operating to specifications and you can continually rely on accurate measurements.



www.agilent.com/quality



Agilent Electronic Measurement Group
DEKRA Certified ISO 9001:2008
Quality Management System

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

www.agilent.com

www.agilent.com/find/waveguidesensor

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:
www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

www.agilent.com/find/contactus

(BP-09-27-13)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2013, 2014
Published in USA, May 9, 2014
5991-3676EN



Agilent Technologies