


R&S®FSWP

Phase Noise Analyzer

Specifications

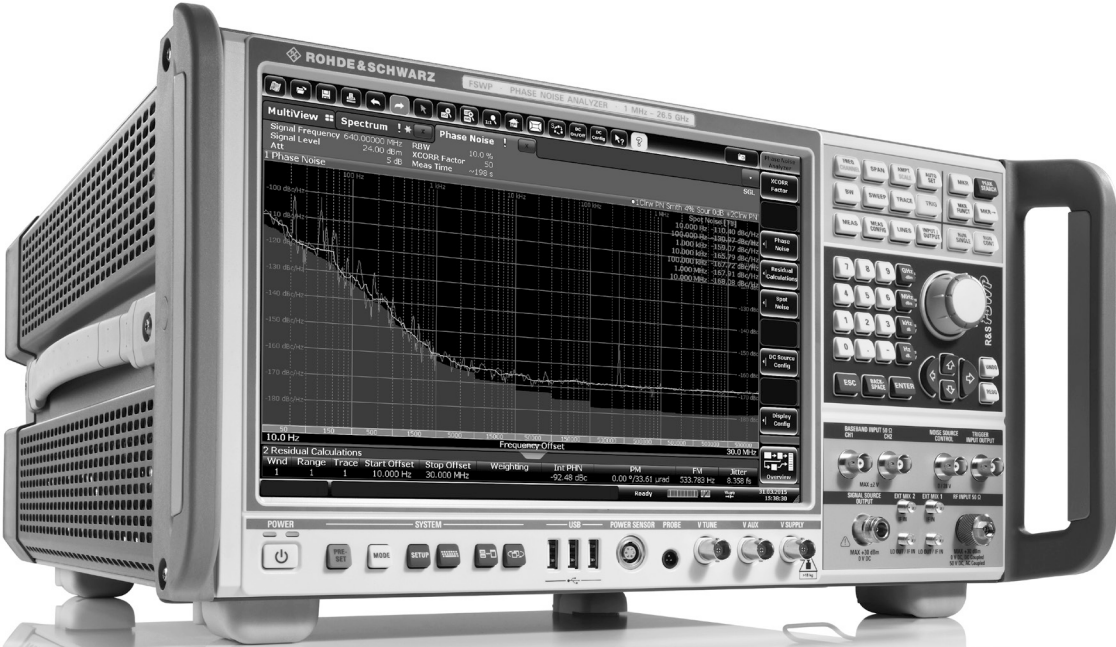

CONTENTS

Definitions	3
Specifications.....	4
Frequency	4
Phase noise measurements	4
<i>Phase noise sensitivity with R&S®FSWP-B60 cross correlation option</i>	<i>5</i>
<i>Phase noise sensitivity without R&S®FSWP-B60 option.....</i>	<i>5</i>
Measurement speed, nominal values.....	5
AM noise measurements	6
<i>AM noise sensitivity.....</i>	<i>6</i>
R&S®FSWP-K4 pulsed phase noise measurements	7
R&S®FSWP-B64 additive phase noise measurements	8
<i>Additive phase noise measurements.....</i>	<i>8</i>
<i>Additive phase noise sensitivity.....</i>	<i>8</i>
<i>Signal source.....</i>	<i>8</i>
Inputs and outputs.....	9
General data	12
R&S®FSWP-B1 spectrum analyzer	14
Frequency	14
Sweep time.....	15
Resolution bandwidths.....	15
Level.....	16
Intermodulation.....	16
Sensitivity	17
Spurious responses	18
Level measurement uncertainty	19
Trigger functions.....	21
I/Q data (R&S®FSWP-B1 option required)	21
R&S®FSWP-B13 highpass filters (R&S®FSWP-B1 option required)	22
R&S®FSWP-B24 RF preamplifier (R&S®FSWP-B1 option required)	22
Ordering information	23
Options.....	23
<i>Firmware.....</i>	<i>24</i>
Recommended extras.....	25
Power sensors supported (R&S®FSWP-B1 option required)	26
Service options.....	27

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

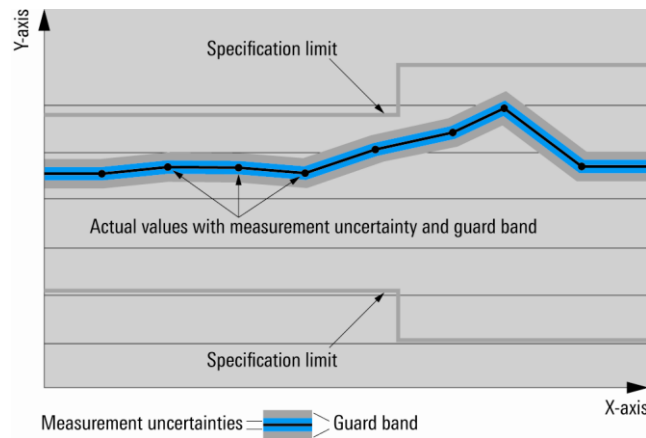

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

Frequency

Frequency range, RF input		
Phase noise, AM noise measurements	R&S®FSWP8	
	DC coupled (requires R&S®FSWP-B1 option)	1 MHz to 8 GHz
	AC coupled	1 MHz to 8 GHz
	R&S®FSWP26	
	DC coupled	1 MHz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSWP50	
	DC coupled	1 MHz to 50 GHz
	AC coupled	10 MHz to 50 GHz
	Baseband noise measurements	R&S®FSWP8
DC coupled (requires R&S®FSWP-B1 option)		10 mHz to 8 GHz
AC coupled		1 MHz to 8 GHz
R&S®FSWP26		
DC coupled		10 mHz to 26.5 GHz
AC coupled		10 MHz to 26.5 GHz
R&S®FSWP50		
DC coupled		10 mHz to 50 GHz
AC coupled		10 MHz to 50 GHz
Frequency resolution		
Reference frequency, internal		
Accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-7}$
	with R&S®FSWP-B4 OCXO precision frequency reference option	
	first year of operation	$\pm 5 \times 10^{-8}$
	after first year of operation	$\pm 3 \times 10^{-8}$
Temperature drift	0 °C to +50 °C	$\pm 1 \times 10^{-9}$
Achievable initial calibration accuracy	standard	$\pm 1 \times 10^{-8}$
	with R&S®FSWP-B4 OCXO precision frequency reference option	$\pm 5 \times 10^{-9}$

Phase noise measurements

Measurement results		SSB phase noise, spurious signals, integrated RMS phase deviation, residual FM, time jitter
Offset frequency range	input signal ≤ 3.33 GHz	10 mHz to 30 % of carrier frequency
	input signal > 3.33 GHz	10 mHz to 1 GHz
Number of traces		6
Phase noise measurement uncertainty	DUT phase noise ≥ 15 dB above phase noise sensitivity of R&S®FSWP	
	10 mHz \leq offset < 1 MHz	< 1.5 dB
	1 MHz \leq offset ≤ 30 MHz	< 2 dB
	offset > 30 MHz	< 3 dB
Level measurement uncertainty	-20 dBm \leq signal level ≤ 15 dBm, $+20$ °C to $+30$ °C	
	1 MHz \leq signal frequency ≤ 8 GHz	< 1 dB
	8 GHz \leq signal frequency ≤ 18 GHz	< 2 dB
	18 GHz \leq signal frequency	< 3 dB
Spurious level	$f_{in} < 1$ GHz	
	10 Hz \leq offset from carrier < 1 kHz	< -90 dBc
	offset from carrier ≥ 1 kHz	< -100 dBc
	$f_{in} \geq 1$ GHz	
	10 Hz \leq offset from carrier < 1 kHz	< -90 dBc + $20 \log(f_{in}/\text{GHz})$
	offset from carrier ≥ 1 kHz	< -100 dBc + $20 \log(f_{in}/\text{GHz})$
AM suppression	10 mHz $<$ offset < 1 MHz	40 dB (nom.)
	1 MHz \leq offset ≤ 30 MHz	30 dB (nom.)

Phase noise sensitivity with R&S®FSWP-B60 cross correlation option

Start offset 1 Hz, correlation factor = 1, frequency reference internal, signal level ≥ 10 dBm, without R&S®FSWP-B4 option.
Specified values in dBc (1 Hz). For typical values subtract 6 dB.

RF input frequency	Offset frequency from the carrier								
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	≥ 30 MHz
10 MHz	-96	-128	-140	-158	-170	-170	-170		
100 MHz	-76	-108	-136	-163	-170	-173	-175	-175	-175
1 GHz	-56	-88	-116	-143	-166	-173	-173	-173	-173
3 GHz	-46	-78	-106	-133	-156	-158	-163	-170	-170
7 GHz	-39	-71	-99	-130	-152	-153	-157	-166	-166
10 GHz	-36	-68	-96	-128	-147	-150	-155	-173	-173
16 GHz	-32	-64	-92	-124	-143	-146	-151	-170	-170
26 GHz	-28	-60	-88	-120	-139	-142	-147	-166	-166
50 GHz	-22	-54	-82	-114	-133	-136	-141	-160	-160

R&S®FSWP-B4 option improves the phase noise sensitivity at 1 Hz offset by 5 dB (nom.). At other offsets the above specification applies.

Improvement of phase noise sensitivity by number of correlations (with R&S®FSWP-B60¹ option)

Correlations	10	100	1000	10 000
Improvement	5 dB	10 dB	15 dB	20 dB

Phase noise sensitivity without R&S®FSWP-B60 option

Start offset 1 Hz, correlation factor = 1, frequency reference internal, signal level ≥ 10 dBm, without R&S®FSWP-B4 option.
Specified values in dBc (1 Hz). For typical values subtract 6 dB.

RF input frequency	Offset frequency from the carrier								
	1 Hz (nom.)	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	≥ 30 MHz
10 MHz	-94	-122	-138	-155	-168	-168	-168		
100 MHz	-74	-102	-130	-155	-167	-170	-170	-170	-170
1 GHz	-54	-82	-110	-135	-147	-150	-157	-170	-170
3 GHz	-44	-72	-100	-125	-137	-140	-147	-167	-170
7 GHz	-37	-65	-93	-118	-130	-133	-140	-160	-163
10 GHz	-34	-62	-90	-115	-127	-130	-137	-157	-160
16 GHz	-30	-58	-86	-111	-123	-126	-133	-153	-156
26 GHz	-26	-54	-82	-107	-119	-122	-129	-149	-152
50 GHz	-20	-48	-76	-101	-113	-116	-123	-143	-146

R&S®FSWP-B4 option improves the phase noise sensitivity at 1 Hz offset by 10 dB (nom.). At other offsets the above specification applies.

Measurement speed, nominal values

The measurement times in the table below apply to the following conditions:
auto freq= off, correlation factor set to ≥ 10 , measurement times normalized to correlation factor = 1.

Span	Bandwidth in % of offset		
	30 %	10 %	3 %
1 Hz to 1 MHz	7 s	8 s	25 s
1 kHz to 1 MHz	0.03 s	0.04 s	0.07 s

To obtain the measurement time for a given number of correlations (without automatic signal frequency search), multiply the above figures by the number of correlations.

¹ Without R&S®FSWP-B60 option the impact of cross correlation is limited by the residual phase noise of the R&S®FSWP local oscillators (1 set only). Therefore the phase noise does not improve with increasing number of correlations as indicated in this table. Instead the specifications indicated in section Phase noise sensitivity without R&S®FSWP-B60 option apply.

AM noise measurements

Offset frequency range	input signal \leq 100 MHz	10 mHz to 30 % of carrier frequency
	input signal $>$ 100 MHz	10 mHz to 30 MHz
AM noise measurement uncertainty	10 mHz $<$ offset $<$ 1 MHz	$<$ 2 dB
	1 MHz \leq offset \leq 30 MHz	$<$ 2.5 dB
Level measurement uncertainty	-20 dBm \leq signal level \leq +15 dBm, +20 °C to +30 °C	
	1 MHz \leq signal frequency $<$ 8 GHz	$<$ 1 dB
	8 GHz \leq signal frequency \leq 18 GHz	$<$ 2 dB
	18 GHz \leq signal frequency	$<$ 3 dB


AM noise sensitivity

Start offset 1 Hz, correlations = 1, signal level \geq 10 dBm Specified values in dBc (1 Hz). For typical values subtract 6 dB.									
RF input	Offset frequency from the carrier								
frequency	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
1 GHz	-105	-120	-135	-150	-158	-165	-165	-165	-165
10 GHz	-90	-105	-120	-135	-150	-160	-165	-165	-165

Improvement of AM noise sensitivity by number of correlations				
Correlations	10	100	1000	10 000
Improvement	5 dB	10 dB	15 dB	20 dB

R&S®FSWP-K4 pulsed phase noise measurements

Signal level ≥ 0 dBm		
Offset frequency range		10 mHz to 50 % of the pulse repetition rate
Pulse repetition rate		0.5 μ s to 5 ms
Duty cycle	manual setting, auto search off	0.01 % to 50 %, pulse width > 100 ns
	auto search on	1 % to 50 %, pulse width > 250 ns
Phase noise measurement uncertainty	10 mHz < offset < 1 Hz	< 3 dB
	1 Hz \leq offset \leq 1 MHz	< 2.5 dB
Phase noise sensitivity	The phase noise sensitivity is limited by additional broadband noise dependent on the duty cycle of the input signal. As long as this broadband noise is more than 10 dB below the specified phase noise sensitivity for continuous wave signals, the phase noise sensitivity specification for CW signals applies.	
Noise floor of phase noise sensitivity	start offset = 1 Hz, correlation factor = 1, signal level ≥ 10 dBm	
Gating = on	frequency < 18 GHz	-175 dBc (1 Hz) - 10xlog(duty cycle) (nom.)
	18 GHz \leq frequency < 30 GHz	-165 dBc (1 Hz) - 10xlog(duty cycle) (nom.)
	30 GHz \leq frequency \leq 50 GHz	-155 dBc (1 Hz) - 10xlog(duty cycle) (nom.)
Gating = off	frequency < 18 GHz	-175 dBc (1 Hz) - 20xlog(duty cycle) (nom.)
	18 GHz \leq frequency < 30 GHz	-165 dBc (1 Hz) - 20xlog(duty cycle) (nom.)
	30 GHz \leq frequency \leq 50 GHz	-155 dBc (1 Hz) - 20xlog(duty cycle) (nom.)

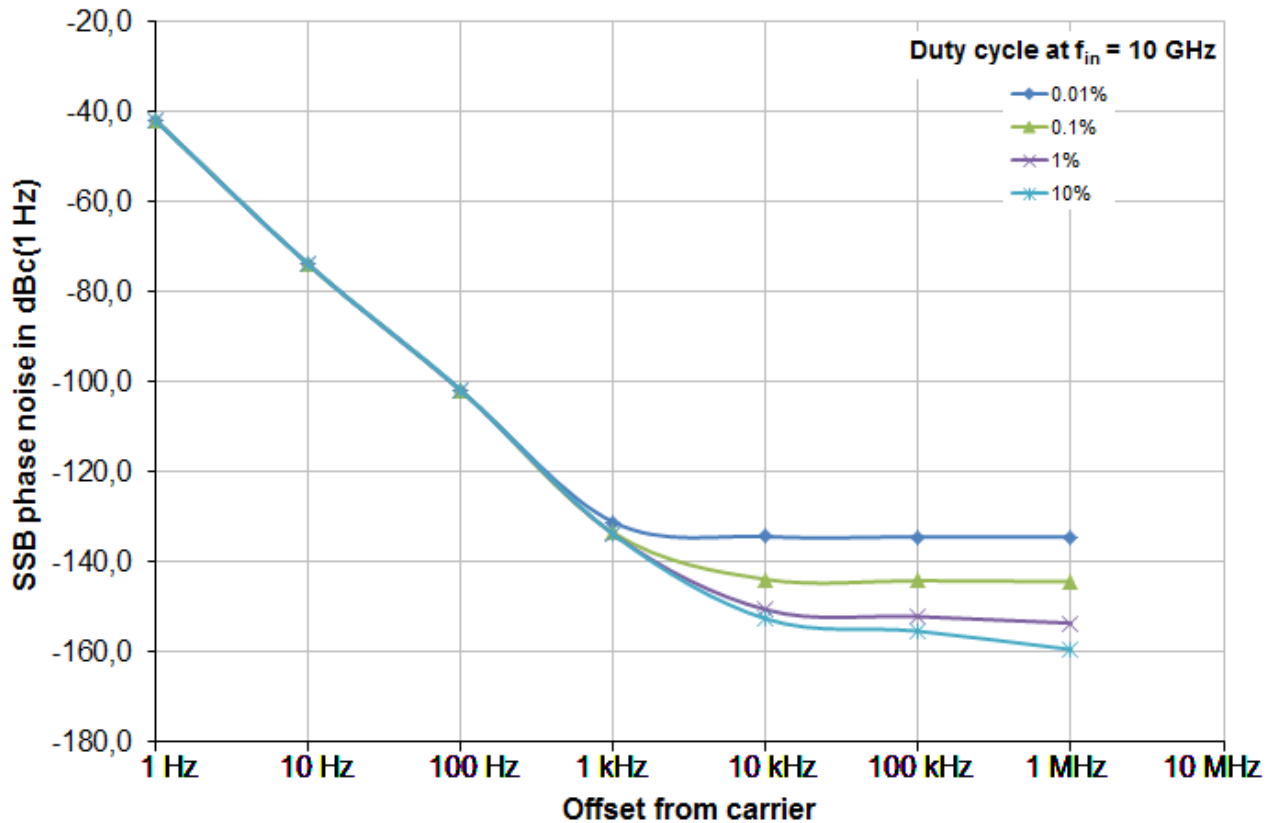

Typical phase noise sensitivity with R&S®FSWP-B60 option at $f_{in} = 10$ GHz
(start offset = 1 Hz, correlation factor = 1, signal level = 10 dBm, gating = on).

R&S®FSWP-B64 additive phase noise measurements

Additive phase noise measurements

Frequency range	R&S®FSWP8	10 MHz to 8 GHz
	R&S®FSWP26	10 MHz to 18 GHz
	R&S®FSWP50	10 MHz to 18 GHz
Offset frequency range		10 mHz to 3 MHz
Measurement uncertainty		< 2 dB (nom.)
Input level measurement uncertainty	-20 dBm ≤ signal level ≤ +15 dBm, +20 °C to +30 °C	
	1 MHz ≤ signal frequency < 8 GHz	
	8 GHz ≤ signal frequency ≤ 18 GHz	


Additive phase noise sensitivity

Start offset 1 Hz, correlation factor = 10, signal level ≥ 10 dBm
Specified values in dBc (1 Hz). For typical values subtract 6 dB.

RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	3 MHz
10 MHz	-106	-115	-128	-140	-148	-148	-148	-148
100 MHz	-118	-132	-143	-152	-155	-155	-155	-153
1 GHz	-115	-123	-137	-147	-160	-165	-165	-161
3 GHz	-115	-128	-143	-147	-165	-165	-160	-156
10 GHz	-85	-104	-120	-138	-148	-154	-164	-160
16 GHz	-82	-98	-120	-138	-148	-154	-164	-160

Signal source

Output level range		-50 dBm to +10 dBm, 10 dB steps
Output level accuracy (temperature +20 °C to +30 °C)	frequency 10 MHz to 16 GHz	± 2 dB
	frequency 16 GHz to 18 GHz	+2 dB to -5 dB

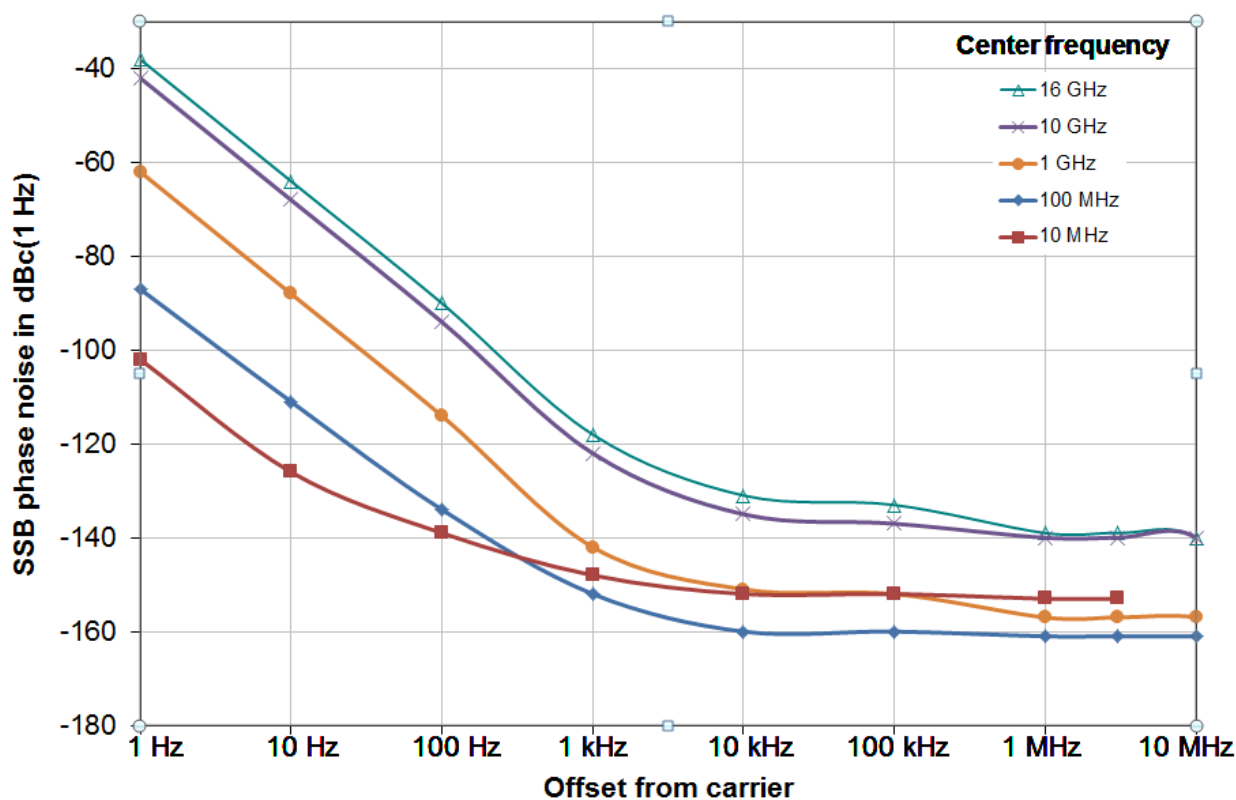

Typical phase noise of signal source output.

Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®FSWP8	N female
	R&S®FSWP26	APC 3.5 mm male (compatible with SMA)
	R&S®FSWP50	1.85 mm male (compatible with 2.4 mm)
VSWR of R&S®FSWP8 without R&S®FSWP-B1 option	10 MHz ≤ f < 3 GHz	1.5 nominal
	3 GHz ≤ f ≤ 8 GHz	2.0 nominal
VSWR of R&S®FSWP8 with R&S®FSWP-B1 option	RF attenuation ≤ 4 dB	
	10 MHz ≤ f ≤ 8 GHz	typ. 1.87 ²
	5 dB ≤ RF attenuation ≤ 9 dB	
	10 MHz ≤ f < 1 GHz	< 1.5, typ. 1.20 ²
	1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.31 ²
	3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.51 ²
	RF attenuation ≥ 10 dB	
	10 MHz ≤ f < 1 GHz	< 1.2, typ. 1.09 ²
	1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.19 ²
	3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.42 ²
VSWR of R&S®FSWP26, R&S®FSWP50	RF attenuation ≤ 4 dB	
	10 MHz ≤ f ≤ 26.5 GHz	typ. 1.87 ²
	26.5 GHz < f ≤ 40 GHz	typ. 2.0 ²
	40 GHz < f ≤ 50 GHz	2.0 (nom.)
	5 dB ≤ RF attenuation ≤ 9 dB	
	10 MHz ≤ f ≤ 3.5 GHz	< 1.5, typ. 1.24 ²
	3.5 GHz < f ≤ 8 GHz	< 1.8, typ. 1.26 ²
	8 GHz < f ≤ 18 GHz	< 1.8, typ. 1.39 ²
	18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.43 ²
	26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.8 ²
40 GHz < f ≤ 50 GHz	2.0 (nom.)	
VSWR of R&S®FSWP26, R&S®FSWP50 (cont.)	RF attenuation ≥ 10 dB	
	10 MHz ≤ f ≤ 3.5 GHz	< 1.2, typ. 1.12 ²
	3.5 GHz < f ≤ 8 GHz	< 1.5, typ. 1.19 ²
	8 GHz < f ≤ 18 GHz	< 1.5, typ. 1.25 ²
	18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.37 ²
	26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.7 ²
40 GHz < f ≤ 50 GHz	2.0 (nom.)	
Setting range of attenuator	R&S®FSWP8	
	without R&S®FSWP-B1 option	no user accessible attenuator
	with R&S®FSWP-B1 option	0 dB to 75 dB, in 5 dB steps ³
	R&S®FSWP26, R&S®FSWP50	
Max. input level		
DC voltage	AC coupled	50 V
	DC coupled	0 V
CW RF power	R&S®FSWP8 without R&S®FSWP-B1 option	
	input frequency < 5 MHz	20 dBm (= 0.1 W)
	input frequency ≥ 5 MHz	30 dBm (= 1 W)
	R&S®FSWP8 with R&S®FSWP-B1 option, R&S®FSWP26, R&S®FSWP50	
RF attenuation = 0 dB	20 dBm (= 0.1 W)	
RF attenuation ≥ 10 dB	30 dBm (= 1 W)	
Pulse spectral density	RF attenuation = 0 dB, RF preamplifier off	97 dB μV/MHz
Max. pulse voltage	R&S®FSWP8 without R&S®FSWP-B1 option	
	any hardware setting	50 V
	R&S®FSWP26, FSWP50, R&S®FSWP8 with R&S®FSWP-B1 option	
	RF attenuation < 10 dB	50 V
RF attenuation ≥ 10 dB	150 V	
Max. pulse energy, pulse duration τ = 10 μs	R&S®FSWP8 without R&S®FSWP-B1 option	
	any hardware setting	0.5 mWs
	R&S®FSWP26, R&S®FSWP50, R&S®FSWP8 with R&S®FSWP-B1 option	
	RF attenuation ≥ 10 dB	1 mWs

² Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

³ With R&S®FSWP-B1 option in spectrum analyzer mode: 0 dB to 79 dB, mechanical RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

RF input		
U_{supply}		
Connector		BNC female
Impedance		50 Ω (nom.)
Output voltage		0 V to 16 V
Output current		0 mA to 2000 mA

U_{aux}		
Connector		BNC female
Impedance		50 Ω (nom.)
Output voltage		-10 V to +10 V
Output current		± 100 mA

U_{tune}		
Connector		BNC female
Impedance		50 Ω (nom.)
Output voltage		-10 V to +28 V
Output current		± 20 mA

Baseband input channel 1		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		DC to 30 MHz
Maximum input level		± 2 V

Baseband input channel 2		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		DC to 30 MHz
Maximum input level		± 2 V

Probe power supply		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)

Noise source control		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

Trigger in/out		
Connector		BNC female
Impedance		50 Ω (nom.)

Power sensor		
Connector		6-pin LEMOSA female for R&S®NRP-Zxx power sensors

Reference input 1 MHz to 20 MHz		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f _{in} ≤ 20 MHz, in 1 Hz steps
Required level		> 0 dBm

Reference input 100 MHz		
Connector		SMA female
Impedance		50 Ω (nom.)
Input frequency range		100 MHz
Required level		0 dBm to 10 dBm

Reference output 10 MHz		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency		10 MHz
Level		10 dBm (nom.)

Reference output 1 MHz to 20 MHz		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	not active
	external reference	same as reference input signal
Level		same as reference input signal

Reference output 100 MHz		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		100 MHz
Level		6 dBm (nom.)

Reference output 640 MHz		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		640 MHz
Level		16 dBm (nom.)

IF/video output (only supported with R&S®FSWP-B1 option in spectrum analyzer mode)		
Connector		BNC female, 50 Ω (nom.)
IF out		
Bandwidth		equal to RBW setting
IF frequency		(RBW/2) to (240 MHz – RBW/2)
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency	0 dBm (nom.)
Video out		
Bandwidth		equal to VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V at 50 Ω load (nom.)

IEC/IEEE bus control		
Command set		interface in line with IEC 625-2 (IEEE 488.2)
Connector		SCPI 1997.0
Interface functions		24-pin Amphenol female SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

LAN interface		
Connector		10/100/1000BASE-T RJ-45

External monitor		
Connector		DVI-D, DisplayPort Rev 1.1

USB interface		
		7 ports, type A plug, version 2.0
		1 port, type B plug, version 2.0

General data

Display		30.7 cm (12.1") WXGA color touchscreen
Resolution		1280 × 800 pixel (WXGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

Data storage		
Internal	standard	solid state disk ≥ 32 Gbyte
External		supports USB 2.0 compatible memory devices

Temperature		
Operating temperature range		+5 °C to +50 °C
Permissible temperature range		0 °C to +55 °C
Storage temperature range		-40 °C to +70 °C
Climatic loading	without condensation	+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

Altitude		
Max. operating altitude	above sea level	4600 m (approx. 15100 ft)

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E method no. 516.4, procedure I, MIL-PRF-28800F, class 3

EMC		in line with EMC Directive 2004/108/EC including: <ul style="list-style-type: none"> • IEC/EN 61326-1 ^{4, 5} • IEC/EN 61326-2-1 • CISPR 11/EN 55011 ⁴ • IEC/EN 61000-3-2 • IEC/EN 61000-3-3
------------	--	---

Recommended calibration interval		1 year
---	--	--------

⁴ Emission limits for class A equipment.

⁵ Immunity test requirement for industrial environment (EN 61326 table 2).

Power supply		
AC input voltage range		100 V to 240 V
AC supply frequency		50 Hz to 60 Hz/400 Hz
Max. input current		7.3 A to 4.6 A (100 V to 240 V)
Power consumption	R&S®FSWP8	
	without options	150 W
	with all options	250 W (meas.)
	R&S®FSWP26	
	without options	175 W
	with all options	275 W (meas.)
Safety	R&S®FSWP50	
	without options	200 W
	with all options	300 W (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Test mark		VDE-GS, cCSA _{US}

Dimensions and weight		
Dimensions (nom.)	W x H x D, including front handles and rear feet	462 mm x 240 mm x 504 mm (18.15 in x 9.44 in x 19.81 in)
Net weight (nom.)	R&S®FSWP8	
	without options	18.6 kg (41.01 lb)
	with all options	22 kg (48.5 lb)
	R&S®FSWP26, with all options	24 kg (52.9 lb)
	R&S®FSWP50, with all options	24.5 kg (54 lb)

R&S®FSWP-B1 spectrum analyzer


The following specifications apply for operation of the R&S®FSWP in spectrum analyzer mode unless otherwise stated.

Frequency

Frequency range	R&S®FSWP8	
	DC coupled	10 Hz to 8 GHz
	AC coupled	10 MHz to 8 GHz
	R&S®FSWP26	
	DC coupled	10 Hz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSWP50	
	DC coupled	10 Hz to 50 GHz
	AC coupled	10 MHz to 50 GHz
Frequency resolution	0.01 Hz	

Frequency readout		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	1001
	range	101 to 100001
Marker tuning frequency step size	marker step size = sweep points	$\text{span}/(\text{sweep points} - 1)$
	marker step size = standard	$\text{span}/(\text{default sweep points} - 1)$
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1\%$

Spectral purity		
SSB phase noise	frequency = 1000 MHz, carrier offset	
	10 Hz, without R&S®FSWP-B4 option	-80 dBc (1 Hz) (nom.)
	10 Hz, with R&S®FSWP-B4 option	-95 dBc (1 Hz) (nom.)
	100 Hz	-106 dBc (1 Hz), typ. -112 dBc (1 Hz)
	1 kHz	< -125 dBc (1 Hz), typ. -130 dBc (1 Hz)
	10 kHz	< -134 dBc (1 Hz), typ. -138 dBc (1 Hz)
	100 kHz	< -136 dBc (1 Hz), typ. -140 dBc (1 Hz)
	1 MHz	< -145 dBc (1 Hz), typ. -149 dBc (1 Hz)
	10 MHz	-156 dBc (1 Hz) (nom.)
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms	< 0.1 Hz (nom.)

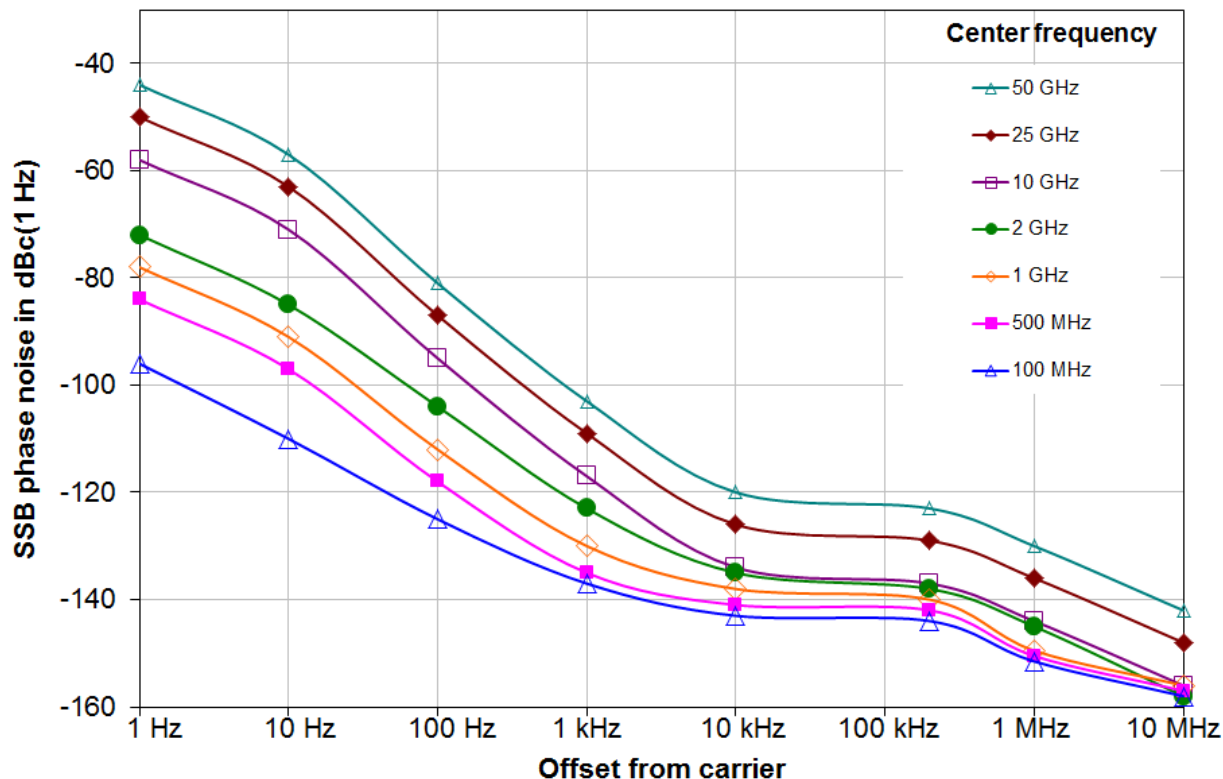

Typical phase noise at different center frequencies in spectrum analyzer mode (with R&S®FSWP-B4 option for offsets ≤ 10 Hz).

Sweep time

Sweep time range	span = 0 Hz	1 μs to 16000 s
	span ≥ 10 Hz	3 μs to 16000 s ⁶
Sweep time accuracy	span = 0 Hz	±0.1 % (nom.)
	span ≥ 10 Hz	±3 % (nom.)

Resolution bandwidths

Sweep filters and FFT filters		
Resolution bandwidths (-3 dB)		1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSWP-B8 option	20 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

Video bandwidths	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSWP-B8 option	20 MHz, 50 MHz, 80 MHz additionally

Signal analysis bandwidth	standard	10 MHz (nom.)
	with R&S®FSWP-B80 option	80 MHz (nom.)

⁶ The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

Level

Level display		
Display range		displayed noise floor up to +30 dBm
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB μ V, dBmV, dB μ A, dBpW
	linear level display	μ V, mV, μ A, mA, pW, nW

Intermodulation

1 dB compression of input mixer (two-tone)	RF attenuation = 0 dB, RF preamplifier off	
	$f_{in} \leq 3$ GHz	+15 dBm (nom.)
	3 GHz $< f_{in} \leq 8$ GHz	+10 dBm (nom.)
	$f_{in} > 8$ GHz	+7 dBm (nom.)
	with R&S®FSWP-B24 option, RF attenuation = 0 dB, RF preamplifier on	
	$f_{in} \leq 3$ GHz	-13 dBm (nom.)
	3 GHz $< f_{in} \leq 8$ GHz	-20 dBm (nom.)
Third-order intercept point (TOI)	RF attenuation = 0 dB, level 2×-15 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier off	
	$f_{in} < 10$ MHz	28 dBm (nom.)
	10 MHz $\leq f_{in} < 1$ GHz	> 25 dBm, typ. 30 dBm
	1 GHz $\leq f_{in} < 3$ GHz	> 20 dBm, typ. 25 dBm ⁷
	3 GHz $\leq f_{in} < 8$ GHz	> 17 dBm, typ. 20 dBm
	8 GHz $\leq f_{in} < 10$ GHz	> 8 dBm
	10 GHz $\leq f_{in} \leq 50$ GHz	> 10 dBm
	R&S®FSWP8, R&S®FSWP26 with R&S®FSWP-B24 option, RF attenuation = 0 dB, level 2×-50 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier on	
	10 MHz $\leq f_{in} < 1$ GHz	-10 dBm (nom.)
	1 GHz $\leq f_{in} < 8$ GHz	-13 dBm (nom.)
	8 GHz $\leq f_{in} \leq 26.5$ GHz	-15 dBm (nom.)
	R&S®FSWP50 with R&S®FSWP-B24 option, RF attenuation = 0 dB, level 2×-55 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier on	
	10 MHz $\leq f_{in} < 1$ GHz	-5 dBm (nom.)
	1 GHz $\leq f_{in} < 4$ GHz	-10 dBm (nom.)
	$f_{in} > 4$ GHz	-20 dBm (nom.)
Second-harmonic intercept point (SHI)	RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	1 MHz $< f_{in} \leq 500$ MHz	> 45 dBm, typ. 55 dBm
	500 MHz $< f_{in} < 1.5$ GHz ⁸	> 47 dBm, typ. 56 dBm
	500 MHz $< f_{in} < 1.5$ GHz ⁹	> 52 dBm, typ. 60 dBm
	1.5 GHz $\leq f_{in} \leq 4$ GHz	> 62 dBm, typ. 70 dBm
	4 GHz $< f_{in} \leq 25$ GHz	65 dBm (nom.)
	with R&S®FSWP-B24 option, RF attenuation = 0 dB, level = -50 dBm, YIG preselector on, RF preamplifier on	
	50 MHz $< f_{in} \leq 21.75$ GHz	10 dBm (nom.)

⁷ With R&S®FSWP-B13 highpass filter option, highpass off. With highpass on, the TOI degrades by 5 dB (nom.).

⁸ Without R&S®FSWP-B13 highpass filter option or highpass off.

⁹ With R&S®FSWP-B13 highpass filter option, highpass on.

Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

Displayed average noise level		
Without R&S®FSWP-B24 option and RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C	
	10 Hz ≤ f ≤ 100 Hz	-110 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm
	1 kHz < f < 9 kHz	-135 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm
	1 GHz < f < 3 GHz ¹⁰	-150 dBm
	1 GHz < f < 3 GHz ¹¹	-153 dBm
	3 GHz ≤ f < 8 GHz	-150 dBm
	8 GHz ≤ f < 13.6 GHz	-148 dBm
	13.6 GHz ≤ f < 18 GHz	-147 dBm
	18 GHz ≤ f < 25 GHz	-145 dBm
	25 GHz ≤ f ≤ 34 GHz	-140 dBm
	34 GHz < f ≤ 40 GHz	-137 dBm
	40 GHz < f ≤ 43.5 GHz	-135 dBm
43.5 GHz < f ≤ 47 GHz	-133 dBm	
47 GHz < f ≤ 49 GHz	-131 dBm	
49 GHz < f ≤ 50 GHz	-129 dBm	
R&S®FSWP8 or R&S®FSWP26 with R&S®FSWP-B24 option and RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	100 kHz < f ≤ 60 MHz	-160 dBm
	60 MHz < f ≤ 3 GHz	-165 dBm
	3 GHz < f ≤ 8 GHz	-162 dBm
	8 GHz < f ≤ 18 GHz	-162 dBm
	18 GHz < f ≤ 23 GHz	-160 dBm
23 GHz < f ≤ 26.5 GHz	-156 dBm	
R&S®FSWP50 with R&S®FSWP-B24 option and RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	100 kHz < f ≤ 60 MHz	-160 dBm
	60 MHz < f ≤ 3 GHz	-165 dBm
	3 GHz < f ≤ 8 GHz	-160 dBm
	8 GHz < f ≤ 18 GHz	-162 dBm
	18 GHz < f ≤ 23 GHz	-160 dBm
	23 GHz < f ≤ 40 GHz	-156 dBm
	40 GHz < f ≤ 43 GHz	-152 dBm
43 GHz < f ≤ 50 GHz	-146 dBm	
Improvement with noise cancellation	for noise-like signals	
	100 kHz < f ≤ 43 GHz	13 dB (nom.)
	43 GHz < f ≤ 50 GHz	0 dB (nom.)

¹⁰ Without R&S®FSWP-B13 highpass filter option or highpass off.

¹¹ With R&S®FSWP-B13 highpass filter option, highpass on.

Spurious responses

Spurious responses	YIG preselector on for $f \geq 8$ GHz, mixer level ≤ -10 dBm ¹² , sweep optimization: auto or dynamic	
Image response	$f_{in} - 2 \times 8997$ MHz (1st IF)	< -90 dBc
	$f_{in} - 2 \times 1317$ MHz (2nd IF)	< -90 dBc
	$f_{in} - 2 \times 37$ MHz (3rd IF)	< -90 dBc
Intermediate frequency response	1st IF (8997 MHz)	< -90 dBc
	2nd IF (1317 MHz)	< -90 dBc
	3rd IF (37 MHz)	< -90 dBc
Residual spurious response	RF attenuation = 0 dB, signal source of option R&S®FSWP-B64 (additive phase noise measurements) turned off	
	$f \leq 1$ MHz	< -90 dBm
	1 MHz < $f \leq 8900$ MHz	< -110 dBm
	8900 MHz < $f \leq 26.5$ GHz	< -100 dBm
	26.5 GHz < $f \leq 50$ GHz	< -100 dBm (nom.)
$f =$ receive frequency		
Local oscillators related spurious	signal source of option R&S®FSWP-B64 (additive phase noise measurements) turned off	
	$f_{in} < 1$ GHz	
	10 Hz \leq offset from carrier < 200 Hz	< -90 dBc
	offset from carrier > 200 Hz	< -100 dBc
	$f_{in} \geq 1$ GHz	
	10 Hz \leq offset from carrier < 200 Hz	< -90 dBc + 20 log ($f_{in}/$ GHz)
offset from carrier > 200 Hz	< -100 dBc + 20 log ($f_{in}/$ GHz)	
Vibrational environmental stimuli	max. 0.21 g (RMS)	< -60 dBc + 20 log ($f_{in}/$ GHz) (nom.)

¹² Mixer level = signal level – RF attenuation + preamplifier gain.

Level measurement uncertainty

Absolute level uncertainty	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB		
	f = 64 MHz	< 0.2 dB ($\sigma = 0.07$ dB)	
Frequency response, referenced to 64 MHz, YIG preselector on	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, +20 °C to +30 °C		
	10 Hz \leq f < 9 kHz	< 1 dB (nom.)	
	9 kHz \leq f < 10 MHz	< 0.45 dB ($\sigma = 0.17$ dB)	
	10 MHz \leq f < 3.6 GHz	< 0.3 dB ($\sigma = 0.10$ dB)	
	3.6 GHz \leq f \leq 8 GHz	< 0.5 dB ($\sigma = 0.17$ dB)	
	8 GHz < f < 22 GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.50$ dB)	
	22 GHz \leq f \leq 26.5 GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)	
	26.5 GHz < f \leq 50 GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)	
	any RF attenuation, +15 °C to +40 °C		
	10 Hz \leq f < 9 kHz	< 1 dB (nom.)	
	9 kHz \leq f < 3.6 GHz	< 0.6 dB ($\sigma = 0.20$ dB)	
	3.6 GHz \leq f \leq 8 GHz	< 0.8 dB ($\sigma = 0.27$ dB)	
	8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)	
	22 GHz \leq f \leq 26.5 GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)	
	26.5 GHz < f \leq 50 GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)	
	RF attenuation \leq 20 dB, RF preamplifier on, +20 °C to +30 °C		
	10 MHz \leq f < 3.6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)	
	3.6 GHz \leq f \leq 8 GHz	< 0.8 dB ($\sigma = 0.27$ dB)	
8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)		
22 GHz \leq f \leq 26.5 GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)		
26.5 GHz < f \leq 50 GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)		
Frequency response, referenced to 64 MHz, YIG preselector off	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off		
	f < 8 GHz	same values as with preselector on	
	8 GHz \leq f < 22 GHz	< 1.5 dB ($\sigma = 0.5$ dB)	
	22 GHz \leq f \leq 26.5 GHz	< 2 dB ($\sigma = 0.6$ dB)	
	26.5 GHz < f \leq 50 GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)	
	any RF attenuation or electronic attenuator on, +15 °C to +40 °C		
	f < 8 GHz	same values as with preselector on	
	8 GHz \leq f < 22 GHz	< 2 dB ($\sigma = 0.6$ dB)	
	22 GHz \leq f \leq 26.5 GHz	< 2.5 dB ($\sigma = 0.75$ dB)	
	26.5 GHz < f \leq 50 GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)	
	RF attenuation \leq 20 dB, RF preamplifier on, +20 °C to +30 °C		
	f < 8 GHz	same values as with preselector on	
	8 GHz \leq f < 22 GHz	< 2 dB ($\sigma = 0.6$ dB)	
	22 GHz \leq f \leq 26.5 GHz	< 2.5 dB ($\sigma = 0.75$ dB)	
	26.5 GHz < f \leq 50 GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)	
	Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ($\sigma = 0.07$ dB)
	Uncertainty of reference level setting	input mixer level \leq -15 dBm	0 dB ¹³
		input mixer level > -15 dBm	< 0.1 dB (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz f = 64 MHz	< 0.2 dB ($\sigma = 0.08$ dB)	

Nonlinearity of displayed level

Logarithmic level display	S/N > 16 dB, 0 dB \leq level \leq -70 dB	< 0.1 dB ($\sigma = 0.04$ dB)
	S/N > 16 dB, -70 dB < level \leq -90 dB	< 0.2 dB ($\sigma = 0.08$ dB)
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

¹³ The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself. The reference level setting causes no additional uncertainty in measurement results.

Total measurement uncertainty		
YIG preselector on	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz ≤ f ≤ 10 MHz	±0.37 dB
	10 MHz < f ≤ 3.6 GHz	±0.27 dB
	3.6 GHz < f ≤ 8 GHz	±0.37 dB
	8 GHz < f ≤ 22 GHz	±1.4 dB
	22 GHz < f ≤ 26.5 GHz	±1.7 dB
YIG preselector off	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	8 GHz ≤ f ≤ 22 GHz	±1.0 dB
	22 GHz < f ≤ 26.5 GHz	±1.2 dB
	26.5 GHz < f ≤ 50 GHz	±1.7 dB

Trigger functions

Trigger		
Trigger source	spectrum analysis	free run, video, external, IF power, RF power
Trigger offset	span \geq 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Min. trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time/number of sweep points
Max. deviation of trigger offset		5 ns
IF power trigger		
Sensitivity	min. signal power	–60 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	–10 dBm + RF attenuation – RF preamplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) ¹⁴
	RBW \leq 500 kHz, FFT	20 MHz (nom.)
	RBW \leq 500 kHz, swept	6 MHz (nom.)
RF power trigger		
Sensitivity	min. signal power	–30 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	+10 dBm + RF attenuation – RF preamplifier gain (nom.)
RF power trigger frequency range	f \leq 8 GHz	8 GHz (nom.)
	f > 8 GHz	center frequency \pm 250 MHz (nom.) ¹⁵
Gated sweep		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Max. deviation of gate length		\pm 5 ns

I/Q data (R&S®FSWP-B1 option required)

Memory length		max. 400 Msample I and Q
Word length of I/Q samples	sampling rate > 100 MHz or number of samples > 300 Msample	18 bit
	otherwise	24 bit
Sampling rate		100 Hz to 200 MHz
Max. signal analysis bandwidth (equalized)	standard	10 MHz
	with R&S®FSWP-B80 option	80 MHz (nom.) ¹⁵
Amplitude flatness	(1.25 \times signal analysis bandwidth) \leq f _{center} < 8 GHz	\pm 0.3 dB (nom.)
	f _{center} \geq 8 GHz, YIG preselector off	\pm 0.5 dB (nom.)
Deviation from linear phase	(1.25 \times signal analysis bandwidth) \leq f _{center} < 8 GHz	\pm 1° (nom.)
	f _{center} \geq 8 GHz, YIG preselector off	\pm 2° (nom.)
Level display nonlinearity		see Nonlinearity of displayed level
Level measurement uncertainty		see Total measurement uncertainty, YIG preselector off
Third-order intermodulation distortion		see Third-order intercept point (TOI)
ADC related spurious response	mixer level = –30 dBm ¹⁶	
	analysis bandwidth < 17 MHz	–100 dBc (nom.)
	17 MHz \leq analysis bandwidth < 80 MHz	–80 dBc (nom.)
Other spurious responses		see Spurious responses

¹⁴ Sweep optimization = auto.

¹⁵ YIG preselector off for f \geq 8 GHz.

¹⁶ Level of a tone at the input mixer (also abbreviated as “mixer level”) = signal level – RF attenuation + preamplifier gain.

R&S®FSWP-B13 highpass filters (R&S®FSWP-B1 option required)

Frequency		
Frequency range	filter 1	1 GHz to 1.75 GHz
	filter 2	1.75 GHz to 3 GHz

Stopband attenuation		
500 MHz to 875 MHz	filter 1	> 20 dB (nom.)
875 MHz to 1.5 GHz	filter 2	> 20 dB (nom.)

Other specifications		
Level measurement uncertainty		see specifications in section Option R&S®FSWP-B1 spectrum analyzer
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

R&S®FSWP-B24 RF preamplifier (R&S®FSWP-B1 option required)

Frequency		
Frequency range	R&S®FSWP8	100 kHz to 8 GHz
	R&S®FSWP26	100 kHz to 26.5 GHz
	R&S®FSWP50	100 kHz to 50 GHz

Setting range		
RF preamplifier gain	R&S®FSWP8	15 dB/30 dB (nom.) (selectable)
	R&S®FSWP26, R&S®FSWP50	30 dB (nom.)

Other specifications		
Level measurement uncertainty		see specifications in section Option R&S®FSWP-B1 spectrum analyzer. The RF preamplifier has no effect on phase noise analyzer specifications
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

Ordering information

Designation	Type	Order No.
Phase Noise Analyzer, 1 MHz to 8 GHz	R&S®FSWP8	1322.8003.08
Phase Noise Analyzer, 1 MHz to 26.5 GHz	R&S®FSWP26	1322.8003.26
Phase Noise Analyzer, 1 MHz to 50 GHz	R&S®FSWP50	1322.8003.50
Accessories supplied		
Power cable, quick start guide and CD-ROM (with operating manual and service manual), R&S®FSWP26: adapter 3.5 mm (APC3.5-compatible) female/female, R&S®FSWP50: adapter 1.85 mm female/female		

Options

Designation	Type	Order No.	Retrofittable	Remarks
Cross-Correlation, 8 GHz	R&S®FSWP-B60	1322.9800.08	yes	for R&S®FSWP8; contact service center
Cross-Correlation, 26 GHz	R&S®FSWP-B60	1322.9800.26	yes	for R&S®FSWP26; retrofittable in factory
Cross-Correlation, 50 GHz	R&S®FSWP-B60	1322.9800.50	yes	for R&S®FSWP50; retrofittable in factory
Additive Phase Noise Measurements	R&S®FSWP-B64	1322.9900.26	yes	frequency range 10 MHz to 8 GHz for R&S®FSWP8, 10 MHz to 18 GHz for R&S®FSWP26 and R&S®FSWP50; contact service center
High Stability OCXO	R&S®FSWP-B4	1325.3890.02	yes	user-retrofittable
Spectrum Analyzer, 10 Hz to 8 GHz	R&S®FSWP-B1	1322.9997.08	yes	for R&S®FSWP8; retrofittable in factory
Spectrum Analyzer, 10 Hz to 26 GHz	R&S®FSWP-B1	1322.9997.26	yes	for R&S®FSWP26; retrofittable in factory
Spectrum Analyzer, 10 Hz to 50 GHz	R&S®FSWP-B1	1322.9997.50	yes	for R&S®FSWP50; retrofittable in factory
External Generator Control	R&S®FSWP-B10	1325.5463.02	yes	contact service center
Resolution Bandwidth > 10 MHz	R&S®FSWP-B8	1313.2464.26	no	for R&S®FSWP8/26 with R&S®FSWP-B1 option. Not available for R&S®FSWP50.
Highpass Filter for Harmonic Measurements	R&S®FSWP-B13	1325.4350.02	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option; user-retrofittable
RF Preamplifier, 100 kHz to 8 GHz	R&S®FSWP-B24	1325.3725.08	yes	for R&S®FSWP8 with option R&S®FSWP-B1; contact service center
RF Preamplifier, 100 kHz to 26.5 GHz	R&S®FSWP-B24	1325.3725.26	yes	for R&S®FSWP26 with R&S®FSWP-B1 option; contact service center
RF Preamplifier, 100 kHz to 50 GHz	R&S®FSWP-B24	1325.3725.50	yes	for R&S®FSWP50 with R&S®FSWP-B1 option; contact service center
80 MHz Analysis Bandwidth	R&S®FSWP-B80	1325.4338.02	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option; user-retrofittable
Spare Solid State Drive (removable hard drive)	R&S®FSWP-B18	1331.4313.02	yes	user-retrofittable

Firmware

Designation	Type	Order No.	Retrofittable	Remarks
Pulsed Phase Noise Measurements	R&S®FSWP-K4	1325.5043.02		
Analog Modulation Analysis for AM/FM/φM	R&S®FSWP-K7	1325.4238.02		R&S®FSWP-B1 option required
Noise Figure Measurements	R&S®FSWP-K30	1325.4244.02		R&S®FSWP-B1 option required
Security Write Protection of solid state drive	R&S®FSWP-K33	1325.5040.02		
Vector Signal Analysis	R&S®FSWP-K70	1325.4280.02		R&S®FSWP-B1 option required

Recommended extras

Designation	Type	Order No.
IEC/IEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
Front Cover	R&S®ZZF-511	1174.8825.00
19" Rack Adapter	R&S®ZZA-KN5	1175.3040.00
Matching pads, 50/75 Ω		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
High-power attenuators		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
Probe Power Connector, 3-pin		1065.9480.00
N-Type Adapter for R&S®RT-Zxx oscilloscope probes	R&S®RT-ZA9	1417.0909.02
DC blocks		
DC Block, 10 kHz to 18 GHz (N type)	R&S®FSE-Z4	1084.7443.02
External harmonic mixers (for instruments with R&S®FSWP-B21 option)		
Harmonic Mixer, 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer, 50 GHz to 75 GHz	R&S®FS-Z75	1048.0271.02
Harmonic Mixer, 60 GHz to 90 GHz	R&S®FS-Z90	1048.0371.02
Harmonic Mixer, 75 GHz to 110 GHz	R&S®FS-Z110	1048.0471.02
Harmonic Mixer, 90 GHz to 140 GHz	RPG FS-Z140 ¹⁷	3622.0708.02
Harmonic Mixer, 110 GHz to 170 GHz	RPG FS-Z170 ¹⁷	3622.0714.02
Harmonic Mixer, 140 GHz to 220 GHz	RPG FS-Z220 ¹⁷	3593.3250.02
Harmonic Mixer, 220 GHz to 325 GHz	RPG FS-Z325 ¹⁷	3593.3267.02
Harmonic Mixer, 325 GHz to 500 GHz	RPG FS-Z500 ¹⁷	3593.3273.02

¹⁷ RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

Power sensors supported (R&S®FSWP-B1 option required) ¹⁸

Designation	Type	Order No.
Universal power sensors		
10 MHz to 8 GHz, 100 mW, 2-path	R&S®NRP-Z211	1417.0409.02
10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
10 MHz to 18 GHz, 100 mW, 2-path	R&S®NRP-Z221	1417.0309.02
10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Power sensor modules with power splitter		
DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
Thermal power sensors		
0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
0 Hz to 110 GHz, 100 mW	R&S®NRP-Z58	1173.7031.02
Average power sensors		
9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02
Three path diode power sensors		
100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
100 pW to 200 mW, 10 MHz to 8 GHz, LAN version	R&S®NRP8SN	1419.0012.02
100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
100 pW to 200 mW, 10 MHz to 18 GHz, LAN version	R&S®NRP18SN	1419.0035.02
100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version	R&S®NRP33SN	1419.0070.02
Wideband power sensor		
50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02

¹⁸ For average power measurement only.

Service options

Service options		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	

Extended warranty with a term of one to four years (WE1 to WE2)

Repairs carried out during the contract term are free of charge ¹⁹. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

Extended warranty with calibration (CW1 to CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ¹⁹ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

WiMAX Forum is a registered trademark of the WiMAX Forum. WiMAX, the WiMAX Forum logo, WiMAX Forum Certified, and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

For product brochure, see PD 3607.2090.12 and www.rohde-schwarz.com

¹⁹ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, radiomonitoring and radiolocation. Founded more than 80 years ago, this independent company has an extensive sales and service network and is present in more than 70 countries. The electronics group is among the world market leaders in its established business fields. The company is headquartered in Munich, Germany. It also has regional headquarters in Singapore and Columbia, Maryland, USA, to manage its operations in these regions.

Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- | North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- | China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3607.2090.22 | Version 02.01 | December 2015 (as)

R&S®FSWP Phase Noise Analyzer

Data without tolerance limits is not binding | Subject to change

© 2015 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3607209022