

# Genesys™

**Programmable DC Power Supplies  
3.3 kW in 2U**

**Built in RS-232 & RS-485 Interface**

**Parallel Current Summing**

**Optional Interfaces: USB**

**LXI Compliant LAN**

**IEEE488.2 SCPI Multi-Drop**

**Isolated Analog Interface**



## **Genesys™ Family**

**GEN H 750W Half Rack**

**GEN 1U 750/1500W Full Rack**

**GEN 2U 3.3/5kW**

**GEN 3U 10/15kW**

**TDK-Lambda**

[www.us.tdk-lambda.com/hp](http://www.us.tdk-lambda.com/hp)

The Genesys™ family of programmable power supplies sets a new standard for flexible, reliable, AC/DC power systems in Test & Measurement, Industrial and Laboratory applications.

## Features include:

- High Power Density 3.3kW in 2U
- Wide Range of popular worldwide AC inputs, 1Ø (230VAC) & 3Ø (208VAC, 400VAC)
- Active Power Factor Correction (Single-Phase & Three-Phase AC Input)
- Output Voltage up to 600V, Current up to 400A
- Built-in RS-232/RS-485 Interface Standard
- Last Setting Memory; Front Panel Lockout
- Advanced Parallel reports total current up to four identical units
- Global Commands for Serial RS-232/RS-485 Interface
- Reliable Encoders for Voltage and Current Adjustment
- Independent Remote ON/OFF and Remote ENABLE/DISABLE
- Reliable Modular and SMT Design
- 19" Rack Mounted for ATE and OEM Applications, zero stack
- Optional Interfaces
  - Isolated Analog Programming and Monitoring
  - IEEE Multi-Drop - SCPI
  - LXI** Compliant LAN Interface
  - USB Interface
- Labview™ and LabWindows™ drivers
- Five Year Warranty

Worldwide Safety Agency Approvals; CE Mark for LVD and EMC Regulation



## Applications

**Genesys™** power supplies are designed for demanding applications. Common controls are shared across all platforms.

**Test & Measurement systems** using GPIB control save significant costs by incorporating the optional IEEE Multi-Drop Interface (IEMD) in the Master. Then up to 30 Slaves may be equipped with the less expensive Optional RS-485 Multi-Drop (MD) interface.

**Automated System** designers will appreciate new, standard, remote programming features such as Global commands. Also, new high-speed status monitoring is available for the RS-485 bus as well as optional LAN (LXI compliant) or USB Interfaces.

**Industrial & Military** high power systems can be configured with up to four identical units in parallel, up to 60kW. No space is required above or below each power supply (zero stack). The Master can be configured by the user to report total current of the combination. Applications include Heaters, Magnets and Laser Diodes.


**Aerospace & Satellite Testing** systems use the complete Genesys™ Family: 1U 750W Half Rack, 1U 750W or 1500W Full-Rack, 2U 3.3kW and 3U 10/15kW. All are identical in Front Panel, Rear Panel Analog and Digital Interface Commands. A wide variety of outputs allows testing of many different devices.

**Component Device Testing** is simplified because of the many user-friendly control options in analog and digital interfaces. Lamps, capacitors, motors and actuators are typical devices tested.

**Medical Imaging and Treatment systems** require reliable power. Modular construction, SMT and thoroughly proven designs assure continuous performance at full rated power.

**Semiconductor Processing & Burn-in** equipment designers appreciate the wide variety of worldwide Inputs and Outputs from which to select depending on application. Selectable Safe and Auto Re-start protects loads and process integrity. Typical applications include Magnets, Filaments and Heaters.

## Front Panel Description

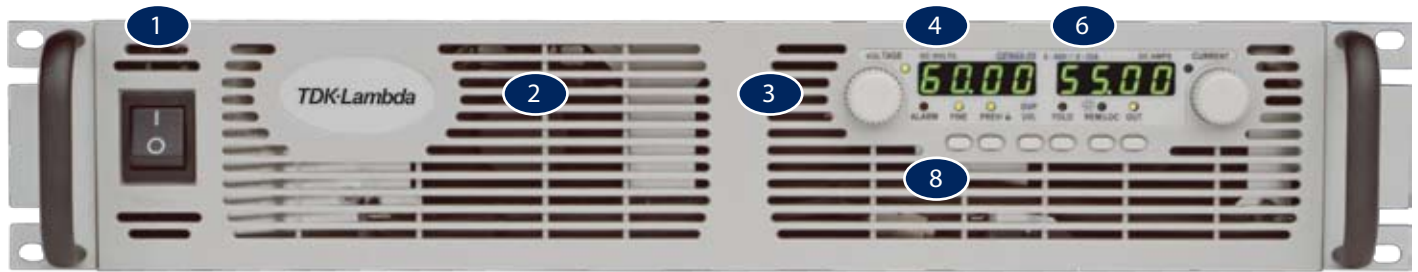

1. ON/OFF Switch
2. Air Intake allows zero stacking for maximum system flexibility and power density.
3. Reliable encoder controls Output Voltage, Address, OVP and UVL settings.
4. Volt Display shows Output Voltage and directly displays OVP, UVL and Address settings.
5. Reliable encoder controls Output Current, sets baudrate, and Advanced Parallel Mode
6. Current Display shows Output Current and displays Baud rate. Displays total current in Parallel Master/Slave Mode
7. Function/Status LEDs:
  - Alarm
  - Foldback Mode
  - Fine Control
  - Remote Mode
  - Preview Settings
  - Output On
8. Pushbuttons allow flexible user configuration
  - Coarse and fine Adjustment of Output Voltage/Current and Advanced Parallel Master or Slave select.
  - Preview settings and set Voltage/Current with Output OFF, Front Panel Lock
  - Parallel Master/Slave
  - Set OVP and UVL Limits
  - Set Current Foldback Protection
  - Go to Local Mode and select Address and Baud rate
  - Output ON/OFF and Auto-Re-Start/Safe-Start Mode

## Rear Panel Description



1. Remote/Local Output Voltage Sense Connections.
2. DIP Switches select 0-5V or 0-10V Programming and other functions.
3. DB25 (Female) connector allows (Non-isolated) Analog Program and Monitor and other functions.
4. RS-485 OUT to other Genesys™ Power Supplies.
5. RS-232/RS-485 IN Remote Serial Programming.
6. Output Connections: Rugged busbars (shown) for up to 100V Output; wire clamp connector for Outputs >100V
7. Exit air assures reliable operation when zero stacked.
8. Input: 230VAC Single Phase (shown), 208 & 400VAC Three Phase, 50/60 Hz  
AC Input Connector: PHOENIX CONTACT Power Combicon PC 6/... Series with strain relief.
9. Optional Interfaces Position for IEEE 488.2 (GPIB) (shown), Isolated Analog Interface, LAN Interface or USB Interface.

LAN Interface complies with **LXI** Class C Specification

# Genesys™ 3.3kW Specifications

| 1.0 MODEL                   | GEN | 8-400 | 10-330 | 15-220 | 20-165 | 30-110 | 40-85 | 60-55 | 80-42 | 100-33 | 150-22 | 300-11 | 600-5.5 |
|-----------------------------|-----|-------|--------|--------|--------|--------|-------|-------|-------|--------|--------|--------|---------|
| 1. Rated output voltage(*1) | V   | 8     | 10     | 15     | 20     | 30     | 40    | 60    | 80    | 100    | 150    | 300    | 600     |
| 2. Rated Output Current(*2) | A   | 400   | 330    | 220    | 165    | 110    | 85    | 55    | 42    | 33     | 22     | 11     | 5.5     |
| 3. Rated Output Power       | W   | 3200  | 3300   | 3300   | 3300   | 3300   | 3400  | 3300  | 3360  | 3300   | 3300   | 3300   | 3300    |

## 1.1 CONSTANT VOLTAGE MODE

|  |                |  |     |      |     |     |     |      |      |      |      |      |      |      |
|--|----------------|--|-----|------|-----|-----|-----|------|------|------|------|------|------|------|
| 1. Max. line regulation (0.01% of rated Vo+ 2mV)(*6) | mV             | 2.8  | 3   | 3.5  | 4   | 5   | 6   | 8    | 10   | 12   | 17   | 32   | 62   |      |
| 2. Max. load regulation (0.015% of rated Vo+5mV)(*7) | mV             | 6.2  | 6.5 | 7.25 | 8   | 9.5 | 11  | 14   | 17   | 20   | 27.5 | 50   | 95   |      |
| 3. Ripple and noise p-p 20MHz (*8)                   | mV             | 60   | 60  | 60   | 60  | 60  | 60  | 60   | 80   | 100  | 100  | 300  | 500  |      |
| 4. Ripple r.m.s 5Hz-1MHz                             | mV             | 8  | 8   | 8    | 8   | 8   | 8   | 8    | 8    | 8    | 25   | 100  | 120  |      |
| 5. Remote sense compensation/wire                    | V              | 2  | 2   | 2    | 2   | 5   | 5   | 5    | 5    | 5    | 5    | 5    | 5    |      |
| 6. Temp. coefficient                                 | PPM/°C         | 100PPM/  |     |      |     |     |     |      |      |      |      |      |      |      |
| 7. Temp. stability                                   |                | 0.05% of rated Vout over 8hrs interval following 30 minutes warm-up. Constant line, load & temp.   |     |      |     |     |     |      |      |      |      |      |      |      |
| 8. Warm-up drift                                     |                | Less than 0.05% of rated output voltage+2mV over 30 minutes following power On.  |     |      |     |     |     |      |      |      |      |      |      |      |
| 9. Up-prog. response time, 0-Vo Rated (*9)           | mS             | 80   |     |      |     |     |     | 150  |      |      |      |      |      | 250  |
| 10. Down-prog response time                          | Full-load (*9) | mS   | 20  | 100  |     |     | 160 |      |      | 300  |      |      | 500  |      |
|  | No-load (*10)  | mS   | 500 | 600  | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1500 | 2000 | 3500 | 4000 |
| 11. Transient response time                          | mS             | Time for output voltage to recover within 0.5% of its rated output for a load change 10-90% of rated output current. Output set-point: 10-100%, local sense.<br>Less than 1mSec for models up to and including 100V. 2msec for models above 100V |     |      |     |     |     |      |      |      |      |      |      |      |

## 1.2 CONSTANT CURRENT MODE

|  |        |   |      |     |      |     |      |     |      |      |     |     |     |
|--|--------|---|------|-----|------|-----|------|-----|------|------|-----|-----|-----|
| 1. Max. line regulation (0.01% of rated Io+ 2mA)(*6) | mA     | 42  | 35   | 24  | 18.5 | 13  | 10.5 | 7.5 | 6.2  | 5.3  | 4.2 | 3.1 | 2.6 |
| 2. Max. load regulation (0.02% of rated Io+5mA)(*11) | mA     | 85  | 71   | 49  | 38   | 27  | 22   | 16  | 13.4 | 11.6 | 9.4 | 7.2 | 6.1 |
| 3. Ripple r.m.s 5Hz-1MHz (*12)                       | mA     | 1300  | 1200 | 880 | 660  | 300 | 200  | 100 | 80   | 70   | 60  | 20  | 10  |
| 4. Load regulation thermal drift                     |        | Less than 0.1% of rated output current over 30 minutes following load change.   |      |     |      |     |      |     |      |      |     |     |     |
| 5. Temp. coefficient                                 | PPM/°C | 200PPM/°C from rated output current, following 30 minutes warm-up.  |      |     |      |     |      |     |      |      |     |     |     |
| 6. Temp. stability                                   |        | 0.05% of rated Iout over 8hrs. interval following 30minutes warm-up. Constant line, load & temperature.   |      |     |      |     |      |     |      |      |     |     |     |
| 7. Warm-up drift                                     |        | 8V-20V models: Less than 0.5% of rated output current over 30 minutes following power On.<br>30V-600V models: Less than 0.25% of rated output current over 30 minutes following power On. |      |     |      |     |      |     |      |      |     |     |     |

## 1.3 PROTECTIVE FUNCTIONS

|                               |  |   |         |       |       |       |       |       |       |        |        |        |        |
|-------------------------------|--|---|---------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| 1. OCP                        |  | 0-105% Constant Current   |         |       |       |       |       |       |       |        |        |        |        |
| 2. OCP Foldback               |  | Output shut down when power supply change from CV to CC. User selectable.                               |         |       |       |       |       |       |       |        |        |        |        |
| 3. OVP type                   |  | Inverter shut-down, manual reset by AC input recycle or by OUT button or by communication port command. |         |       |       |       |       |       |       |        |        |        |        |
| 4. OVP trip point             |  | 0.5-10V   | 0.5-12V | 1-18V | 1-24V | 2-36V | 2-44V | 5-66V | 5-88V | 5-110V | 5-165V | 5-330V | 5-660V |
| 5. Output Under Voltage Limit |  | Preset by front panel or communication port. Prevents from adjusting Vout below limit.                  |         |       |       |       |       |       |       |        |        |        |        |
| 6. Over Temp. Protection      |  | User selectable, latched or non-latched.  |         |       |       |       |       |       |       |        |        |        |        |

## 1.4 ANALOG PROGRAMMING AND MONITORING

|   |  |   |  |  |  |  |  |  |  |  |  |  |  |
|---|--|---|--|--|--|--|--|--|--|--|--|--|--|
| 1. Vout Voltage Programming               |  | 0-100%, 0-5V or 0-10V, user select. Accuracy and linearity: ±0.5% of rated Vout.          |  |  |  |  |  |  |  |  |  |  |  |
| 2. Iout Voltage Programming (*13)         |  | 0-100%, 0-5V or 0-10V, user select. Accuracy and linearity: ±1% of rated Iout.            |  |  |  |  |  |  |  |  |  |  |  |
| 3. Vout Resistor Programming              |  | 0-100%, 0-5/10Kohm full scale, user select. Accuracy and linearity: ±1% of rated Vout.    |  |  |  |  |  |  |  |  |  |  |  |
| 4. Iout Resistor Programming (*13)        |  | 0-100%, 0-5/10Kohm full scale, user select. Accuracy and linearity: ±1.5% of rated Iout.  |  |  |  |  |  |  |  |  |  |  |  |
| 5. On/Off control (rear panel)            |  | By electrical. Voltage: 0-0.6V/2-15V, or dry contact, user selectable logic.              |  |  |  |  |  |  |  |  |  |  |  |
| 6. Output Current monitor (*13)           |  | 0-5V or 0-10V, Accuracy: ±1%, user selectable.  |  |  |  |  |  |  |  |  |  |  |  |
| 7. Output Voltage monitor                 |  | 0-5V or 0-10V, Accuracy: ±1%, user selectable.  |  |  |  |  |  |  |  |  |  |  |  |
| 8. Power Supply OK signal                 |  | TTL high (4-5V) -OK, 0V-Fail 500ohm series resistance.                                    |  |  |  |  |  |  |  |  |  |  |  |
| 9. CV/CC Indicator                        |  | CV: TTL high (4-5V) source: 10mA, CC: TTL low (0-0.6V), sink current: 10mA.               |  |  |  |  |  |  |  |  |  |  |  |
| 10. Enable/Disable                        |  | Dry contact. Open: off, Short: on. Max. voltage at Enable/Disable in: 6V.                 |  |  |  |  |  |  |  |  |  |  |  |
| 11. Local/Remote analog control           |  | By electrical signal or Open/Short: 0-0.6V or short: Remote, 4-5V or open: Local.         |  |  |  |  |  |  |  |  |  |  |  |
| 12. Local/Remote analog control Indicator |  | Open collector, Local: Off, Remote: On. Maximum voltage: 30V, maximum sink current: 10mA. |  |  |  |  |  |  |  |  |  |  |  |

## 1.5 FRONT PANEL

|                      |  |  |  |  |  |  |  |  |  |  |  |  |  |
|----------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 1. Control functions |  | Vout/ Iout manual adjust by separate encoders (coarse and fine adjustment selectable).   |  |  |  |  |  |  |  |  |  |  |  |
|                      |  | OVP/UVL manual adjust by Volt. Adjust encoder.   |  |  |  |  |  |  |  |  |  |  |  |
|                      |  | On/Off, Output on/off, Re-start modes (auto, safe), Foldback control (CV to CC), Go to local control.                                      |  |  |  |  |  |  |  |  |  |  |  |
|                      |  | Address selection by Voltage (or current) adjust encoder. Number of addresses: 31.   |  |  |  |  |  |  |  |  |  |  |  |
|                      |  | Re-start modes (automatic restart, safe mode).   |  |  |  |  |  |  |  |  |  |  |  |
| 2. Display           |  | Baud rate selection: 1200, 2400, 4800, 9600 and 19,200.  |  |  |  |  |  |  |  |  |  |  |  |
|                      |  | Voltage: 4 digits, Accuracy: 0.5% of rated output Voltage ±1 count.<br>Current: 4 digits, Accuracy: 0.5% of rated output current ±1 count. |  |  |  |  |  |  |  |  |  |  |  |
| 3. Indications       |  | Voltage, Current, Alarm, Fine, Preview, Foldback, Local, Output On, Front Panel Lock, CVCC.  |  |  |  |  |  |  |  |  |  |  |  |

## 1.6 Interface RS232&RS485 or Optional GPIB Interface

| Model  | V  | 8    | 10   | 15   | 20   | 30   | 40   | 60  | 80  | 100  | 150  | 300  | 600  |
|--|----|------|------|------|------|------|------|-----|-----|------|------|------|------|
| <b>1. Remote Voltage Programming (16 bit)</b>              |    |      |      |      |      |      |      |     |     |      |      |      |      |
| Resolution (0.012% of Vo Rated)                            | mV | 0.96 | 1.2  | 1.8  | 2.40 | 3.60 | 4.80 | 7.2 | 9.6 | 12   | 18   | 36   | 72   |
| Accuracy (0.05%Vo Rated+0.05% of Vo Actual Output)         | mV | 8    | 10   | 15   | 20   | 30   | 40   | 60  | 80  | 100  | 150  | 300  | 600  |
| <b>2. Remote Current Programming (16 bit)</b>              |    |      |      |      |      |      |      |     |     |      |      |      |      |
| Resolution (0.012% of Io Rated)                            | mA | 48   | 39.6 | 26.4 | 19.8 | 13.2 | 10.2 | 6.6 | 5.0 | 4.0  | 2.6  | 1.3  | 0.7  |
| Accuracy (0.2% of Io Rated+0.1% of Io Actual Output) (*13) | mA | 1200 | 990  | 660  | 495  | 330  | 255  | 165 | 126 | 99   | 66   | 33   | 16.5 |
| <b>3. Readback Voltage</b>                                 |    |      |      |      |      |      |      |     |     |      |      |      |      |
| Resolution (0.012% of Vo Rated)                            | mV | 0.96 | 1.2  | 1.8  | 2.40 | 3.60 | 4.80 | 7.2 | 9.6 | 12   | 18   | 36   | 72   |
| Accuracy (0.1%Vo Rated+0.1% of Vo Actual Output)           | mV | 16   | 20   | 30   | 40   | 60   | 80   | 120 | 160 | 200  | 300  | 600  | 1200 |
| <b>4. Readback Current</b>                                 |    |      |      |      |      |      |      |     |     |      |      |      |      |
| Resolution (0.012% of Io Rated)                            | mA | 48   | 39.6 | 26.4 | 19.8 | 13.2 | 10.2 | 6.6 | 5.0 | 4.0  | 2.6  | 1.3  | 0.7  |
| Accuracy (0.3% of Io Rated+0.1% of Io Actual Output) (*13) | mA | 1600 | 1320 | 880  | 660  | 440  | 340  | 220 | 168 | 132  | 88   | 44   | 22   |
| <b>5. OVP/UVL Programming</b>                              |    |      |      |      |      |      |      |     |     |      |      |      |      |
| Resolution (0.1% of Vo Rated)                              | mV | 8    | 10   | 15   | 20   | 30   | 40   | 60  | 80  | 100  | 150  | 300  | 600  |
| Accuracy (1% of Vo Rated)                                  | mV | 80   | 100  | 150  | 200  | 300  | 400  | 600 | 800 | 1000 | 1500 | 3000 | 6000 |

\*1: Minimum voltage is guaranteed to maximum 0.2% of rated output voltage.

\*2: Minimum current is guaranteed to maximum 0.4% of rated output current.

\*3: For cases where conformance to various safety standards (UL, IEC, etc.) is required, to be described as 190-240Vac (50/60Hz) for single phase and 3-Phase 208V models, and 380-415Vac (50/60Hz) for 3-Phase 400V models.

\*4: Single-Phase and 3-Phase 208V models: At 208Vac input voltage, 3-Phase 400V: At 380Vac input voltage. With rated output power.

\*5: Not including EMI filter inrush current, less than 0.2mSec.

\*6: Single-Phase and 3-Phase 208V models: 170-265Vac, constant load. 3-Phase 400V models: 342-460Vac, constant load.

\*7: From No-Load to Full-Load, constant input voltage. Maximum drop in Remote Sense.

\*8: For 8V-300V models: Measured with JEITA RC-9131A (1:1) probe. For 600V model: Measured with 10:1 probe.

\*9: From 10% to 90% or 90% to 10% of Rated Output Voltage, with rated, resistive load.

\*10: From 90% to 10% of Rated Output Voltage.

\*11: For load voltage change, equal to the unit voltage rating, constant input voltage.

\*12: For 8V-15V models the ripple is measured from 2V to rated output voltage and rated output current. For other models, the ripple is measured at 10-100% of rated output voltage and rated output current.

\*13: The Constant Current programming readback and monitoring accuracy does not include the warm-up and Load regulation thermal drift.

# General Specifications Genesys™ 3.3kW

## 2.1 INPUT CHARACTERISTICS

|                                       |                           | GEN | 8-400   | 10-330 | 15-220 | 20-165 | 30-110 | 40-85 | 60-55 | 80-42 | 100-33 | 150-22 | 300-11 | 600-5.5 |
|---------------------------------------|---------------------------|-----|---|--------|--------|--------|--------|-------|-------|-------|--------|--------|--------|---------|
| 1. Input voltage/freq. (*3)           |                           | VAC | Single Phase,230V models: 170–265Vac, 47–63Hz<br>3-Phase, 208V models: 170–265Vac, 47–63Hz<br>3-Phase, 400V models: 342–460Vac, 47–63Hz |        |        |        |        |       |       |       |        |        |        |         |
| 2. Maximum Input current at 100% load | Single Phase,230V models: | A   | 24  | 24     | 24     | 23     | 24     | 23    | 23    | 23.5  | 23     | 23     | 23     | 23      |
|                                       | 3-Phase, 208V models:     | A   | 14.5  | 14.5   | 14.5   | 14.5   | 14     | 14.5  | 13.6  | 14    | 13.7   | 13.7   | 13.8   | 13.9    |
|                                       | 3-Phase, 400V models:     | A   | 7.2   | 7.2    | 7.2    | 7.2    | 7      | 7.2   | 6.8   | 7     | 6.8    | 6.8    | 6.9    | 7       |
| 3. Power Factor (Typ)                 |                           |     | Single Phase models: 0.99@230Vac, rated output power. 3-Phase models: 0.94@208/380Vac, rated output power.                              |        |        |        |        |       |       |       |        |        |        |         |
| 4. Efficiency (*4)                    |                           | %   | 82  | 84     | 84     | 86     | 86     | 88    | 88    | 88    | 88     | 88     | 88     | 87      |
| 5. Inrush Current (*5)                |                           | A   | Single-Phase and 3-Phase 208V models: Less than 50A<br>3-Phase 400V models: Less than 20A   |        |        |        |        |       |       |       |        |        |        |         |
| 6. Hold-up time (Typ)                 |                           | mS  | 10mSec for Single-Phase and 3-phase 208V models, 6mSec for 3-Phase 400V models. Rated output power.                                     |        |        |        |        |       |       |       |        |        |        |         |

## 2.2 POWER SUPPLY CONFIGURATION

|                       |  |
|-----------------------|--|
| 1. Parallel Operation | Up to 4 identical units in master/slave mode with parallel current summing (Advanced Parallel) |
| 2. Series Operation   | Up to 2 identical units. with external diodes. 600V Max to Chassis ground                      |

## 2.3 ENVIRONMENTAL CONDITIONS

|                       |   |
|-----------------------|---|
| 1. Operating temp     | 0–50 °C, 100% load.   |
| 2. Storage temp       | -30–85°C  |
| 3. Operating humidity | 20–90% RH (non-condensing).   |
| 4. Storage humidity   | 10–95% RH (non-condensing).   |
| 5. Vibration          | MIL-810F, method 514.5 , The EUT is fixed to the vibrating surface.   |
| 6. Shock              | Less than 20G , half sine , 11mSec. Unit is unpacked.   |
| 7. Altitude           | Operating: 10000ft (3000m), Derate output current by 2%/100m above 2000m, Alternatively, derate maximum ambient temp. by 1°C/100m above 2000m. Non operating: 40000ft (12000m). |
| 8. RoHS Compliance    | Complies with the requirements of RoHS directive.   |

## 2.4 EMC

|                            |   |
|----------------------------|---|
| 1. Applicable Standards:   |   |
| 2. ESD                     | IEC1000-4-2. Air-disch.-8KV, contact disch.-4KV   |
| 3. Fast transients         | IEC1000-4-4. 2KV                                  |
| 4. Surge immunity          | IEC1000-4-5. 1KV line to line, 2KV line to ground |
| 5. Conducted immunity      | IEC1000-4-6, 3V                                   |
| 6. Radiated immunity       | IEC1000-4-3, 3V/m                                 |
| 7. Magnetic field immunity | EN61000-4-8, 1A/m                                 |
| 8. Voltage dips            | EN61000-4-11                                      |
| 9. Conducted emission      | EN55022A, FCC part 15-A, VCCI-A.                  |
| 10. Radiated emission      | EN55022A, FCC part 15-A, VCCI-A.                  |

## 2.5 SAFETY

|                          |  |
|--------------------------|--|
| 1. Applicable standards: | <b>CE Mark, UL60950, EN60950 listed.</b> Vout<40V: Output is SELV , IEEE/Isolated analog are SELV.<br>40<Vout<400V: Output is hazardous, IEEE/Isolated analog are SELV.<br>400<Vout<600V: Output is hazardous, IEEE/Isolated analog are not SELV.  |
| 2. Withstand voltage     | Vout: 40V models :Input-Outputs (SELV): 4242VDC 1min, Input-Ground: 2828VDC 1min.<br>40<Vout<100V models: Input-Haz. Output: 2600VDC 1min, Input-SELV: 4242VDC 1min.<br>Hazardous Output-SELV: 1900VDC 1min, Hazardous Output-Ground:1200VDC 1min. Input-Ground: 2828VDC 1min.<br>100<Vout<600V models: Input-Haz. Output: 4000VDC 1min, Input-SELV: 4242VDC 1min.<br>Hazardous Output-SELV: 3550VDC 1min. Hazardous Output-Ground:2670VDC 1min. Input-Ground: 2828VDC 1min. |
| 3. Insulation resistance | More than 100Mohm at 25°C , 70% RH.  |

## 2.6 MECHANICAL CONSTRUCTION


|   |   |
|---|---|
| 1. Cooling                                    | Forced air flow: from front to rear. No ventilation holes at the top or bottom of the chassis; Variable fan speed.  |
| 2. Dimensions (WxHxD)                         | W: 16.65in, H: 3.46in, D: 17.42in (excluding connectors, encoders, handles, etc.)   |
| 3. Weight                                     | 13 kg.  |
| 4. AC Input connector (with Protective Cover) | Single Phase,230V models, Power Combicon PC 6-16/3-GF-10,16 series, with Strain relief.<br>3-Phase, 208V & 400V models, Power Combicon PC 6-16/4-GF-10,16 series, with Strain relief. |
| 5. Output connectors                          | 8V to 100V models: Bus-bars (hole Ø 10.5mm). 150V to 600V models: wire clamp connector, Phoenix P/N: FRONT-4-H-7.62   |

## 2.7 RELIABILITY SPECS

|             |          |
|-------------|----------|
| 1. Warranty | 5 years. |
|-------------|----------|

All specifications subject to change without notice.

## Outline Drawing Genesys™ 3.3kW Units

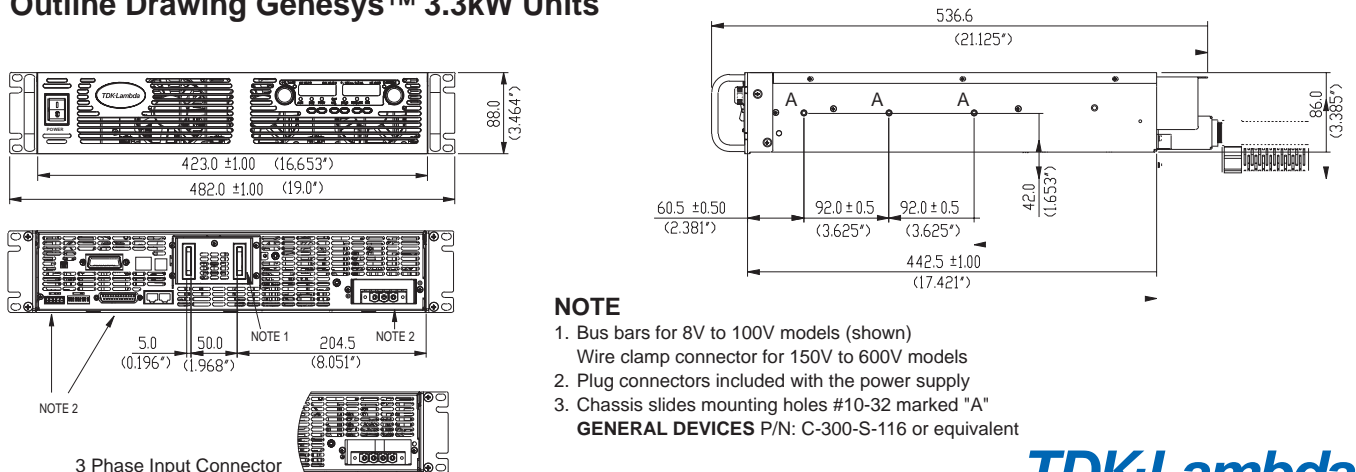

# Genesys™ Power Parallel and Series Configurations

## Parallel operation - Master/Slave:

Active current sharing allows up to four identical units to be connected in an auto-parallel configuration for four times the output power.

In Advanced Parallel Master/Slave Mode, total current is programmed and reported by the Master. Up to four supplies act as one.


## Series operation

Up to two units may be connected in series to increase the output voltage or to provide bipolar output. (Max 600V to Chassis Ground).



## Remote Programming via RS-232 & RS-485 Interface

Standard Serial Interface allows daisy-chain control of up to 31 power supplies on the same communication bus with built-in RS-232 & RS-485 Interface with or without Multi-Drop option.



## Programming Options (Factory installed)

### New IEEE Multi-Drop Interface

P/N: IEMD

- Allows IEEE Master to control up to 30 (Multi-Drop equipped) slaves over RS-485 daisy-chain
- Only the Master needs be equipped with IEEE Interface
- IEEE 488.2 SCPI Compliant
- Program Voltage
- Measure Voltage
- Over Voltage setting and shutdown
- Error and Status Messages
- Program Current
- Measure Current
- Current Foldback shutdown

### New Multi-Drop Slave Option

P/N: MD

- Slaves need to be equipped with the MD Slave (RS-485) option

### Isolated Analog Programming

- Four Channels to Program and Monitor Voltage and Current.
- Isolation allows operation with floating references in harsh electrical environments.
- Choose between programming with Voltage or Current.
- Connection via removable terminal block: Phoenix MC1,5/8-ST-3.81.

- Voltage Programming, user-selectable 0-5V or 0-10V signal.  
Power supply Voltage and Current Programming Accuracy  $\pm 1\%$   
Power supply Voltage and Current Monitoring Accuracy  $\pm 1.5\%$
- Current Programming with 4-20mA signal.  
Power supply Voltage and Current Programming Accuracy  $\pm 1\%$   
Power supply Voltage and Current Monitoring Accuracy  $\pm 1.5\%$

P/N: IS510

P/N: IS420

### LAN Interface

### LXI Compliant to Class C

P/N: LAN

- Meets all LXI-C Requirements
- Address Viewable on Front Panel
- Fixed and Dynamic Addressing
- Fast Startup
- VISA & SCPI Compatible
- LAN Fault Indicators
- Auto-detects LAN Cross-over Cable
- Compatible with most standard Networks

### USB Interface

P/N: USB

- Allows Serial Connection to USB Port on computer
- Serial commands same as (standard) RS-232/RS-485 Interface

# Power Supply Identification / Accessories

## How to order

|             |                       |                         |                              |  |   |
|-------------|-----------------------|-------------------------|------------------------------|--|---|
| <b>GEN</b>  | <b>8</b>              | -                       | <b>400</b>                   | -  | -   |
| Series Name | Output Voltage (0~8V) | Output Current (0~400A) | Factory Options<br>Option: : | IEMD<br>MD<br>IS510<br>IS420<br>LAN<br>USB | AC Input options<br>1P230 (Single Phase 230VAC)<br>3P208 (Three Phase 208VAC)<br>3P400 (Three Phase 400VAC) |

### Models 3.3kW

| Model      | Output Voltage VDC | Output Current (A) | Output Power (W) |
|------------|--------------------|--------------------|------------------|
| GEN 8-400  | 0~8V               | 0~400              | 3200             |
| GEN 10-330 | 0~10V              | 0~330              | 3300             |
| GEN 15-220 | 0~15V              | 0~220              | 3300             |
| GEN 20-165 | 0~20V              | 0~165              | 3300             |
| GEN 30-110 | 0~30V              | 0~110              | 3300             |
| GEN 40-85  | 0~40V              | 0~85               | 3400             |

| Model       | Output Voltage VDC | Output Current (A) | Output Power (W) |
|-------------|--------------------|--------------------|------------------|
| GEN 60-55   | 0~60V              | 0~55               | 3300             |
| GEN 80-42   | 0~80V              | 0~42               | 3360             |
| GEN 100-33  | 0~100V             | 0~33               | 3300             |
| GEN 150-22  | 0~150V             | 0~22               | 3300             |
| GEN 300-11  | 0~300V             | 0~11               | 3300             |
| GEN 600-5.5 | 0~600V             | 0~5.5              | 3300             |

### Factory options

|   |     |       |
|---|-----|-------|
| RS-232/RS-485 Interface built-in Standard     | P/N | -     |
| GPIB (Multi-Drop Master) Interface            |     | IEMD  |
| Multi-Drop Slave Interface                    |     | MD    |
| Voltage Programming Isolated Analog Interface |     | IS510 |
| Current Programming Isolated Analog Interface |     | IS420 |
| LAN Interface                                 |     | LAN   |
| USB Interface                                 |     | USB   |

## Accessories

### 1. Serial Communication cable

RS-232/RS-485 cable is used to connect the power supply to the Host PC.

| Mode                   | RS-485               | RS-232               | RS-232               |
|------------------------|----------------------|----------------------|----------------------|
| PC Connector           | DB-9F                | DB-9F                | DB-25F               |
| Communication Cable    | Shield Ground L=2m   | Shield Ground L=2m   | Shield Ground L=2m   |
| Power Supply Connector | EIA/TIA-568A (RJ-45) | EIA/TIA-568A (RJ-45) | EIA/TIA-568A (RJ-45) |
| P/N                    | GEN/485-9            | GEN/232-9            | GEN/232-25           |

### 2. Serial link cable\*

Daisy-chain up to 31 Genesys™ power supplies.

| Mode   | Power Supply Connector | Communication Cable  | P/N      |
|--------|------------------------|----------------------|----------|
| RS-485 | EIA/TIA-568A (RJ-45)   | Shield Ground L=50cm | GEN/RJ45 |

\* Included with power supply



**Also Available Genesys™**  
**1U Half Rack 750W**  
**1U 750W/1500W**  
**2U 5kW**  
**3U 10/15kW**

## USA

TDK-Lambda Americas, Inc.  
405 Essex Rd. Neptune, NJ 07753  
Tel: +1-732-922-9300 Fax: +1-732-922-1441  
E-mail: sales@us.tdk-lambda.com  
www.us.tdk-lambda-hp.com/hp

## CANADA

Testforce  
9450 Trans-Canada Hwy, St. Laurent QC H4S 1R7  
Tel: +1-514-856-0970 Fax: +1-514-856-6983  
Email: sales@testforce.com  
www.testforce.com

## MEXICO

GADU  
Rosas 139 Col. Bugambilias. Puebla, Pue. C.P. 72580  
Tel: +52-800-211-0060 Fax: +52-264-1445  
Email: julian@gadu.co..mx  
www.gadu.com.mx

## BRAZIL

Suplitech  
Rua Sena Madureira 455, Belo Hte - 31340-000  
Tel: +55-31-3498 1177 Fax: +55-31-3441 0841  
www.suplitech.com.br

## UK

TDK-Lambda UK  
Kingsley Avenue  
Ilfracombe, Devon EX 34 8ES  
Tel: +44-1271-856666 Fax: +44-1271-864894  
E-mail: powersolutions@uk.tdk-lambda.com  
www.uk.tdk-lambda.com

## IRELAND

## FRANCE

TDK-Lambda France  
ZAC des Delaches BP 1077 - Gometz le Chatel  
91940 LES ULIS  
Tel: +33 1 60 12 71 65 Fax: +33 1 60 12 71 66  
www.fr.tdk-lambda.com

## NETHERLANDS

## SPAIN

## GERMANY

TDK-Lambda Germany  
Karl-Bold-Str.40, D-77855 Achern  
Tel: +49-7841-666-0 Fax: +49-7841-500-0  
E-mail: info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com

## AUSTRIA

## SWITZERLAND

## ITALY

TDK-Lambda Italy  
Via dei Lavoratori 128/130  
IT 20092 Cinisello Balsamo (MI)  
Tel: +39-02-6129-3863 Fax: +39-02-6129-0900  
www.it.tdk-lambda.com

## SCANDINAVIA

TDK-Lambda Scandinavia  
Rallarvägen 41  
SE-184 40 Akersberga  
Sweden  
Tel: +46 854 084 990 Fax: +46 854 066 096  
E-mail: info@se.tdk-lambda.com  
www.se.tdk-lambda.com

## RUSSIA

## BALTICS

## JAPAN

TDK-Lambda Corporation  
1-11-15 Dempa Bldg, 1-11-15 Higashi-Gotanda,  
Shinagawa-Ku, Tokyo 141-0022  
Tel: +81 3 3447 4693 Fax: +81 3 3447 4750  
www.jp.tdk-lambda.com

## CHINA

TDK-Lambda Shanghai Office  
28F, Xingyuan Technology Building No.418, Guiping Road,  
Shanghai, 200233 P.R. CHINA  
Tel: +86-21-6485-0777 Fax: +86-21-6485-0666  
www.cn.tdk-lambda.com

TDK-Lambda Beijing Office  
Room 12B11-12B12, Unit 7 DACHENG SQUARE,  
No.28 Xuanwumenxi Street, Xuanwu District Beijing,  
100053, P.R. CHINA  
Tel: +86-10-6310-4872 Fax: +86-10-6310-4874  
www.cn.tdk-lambda.com

TDK-Lambda Hong Kong Office  
Room. 8, 27/F, Mega Trade Center  
1 Mei Wan St. Tsuen Wan, N.T.  
Tel: +852-2420-6693 Fax: +852-2420-3362  
www.cn.tdk-lambda.com

## KOREA

TDK-Lambda Corporation  
6F Songok Bldg. 4-1 Soonae-Dong  
Pundang-Gu, Songnam-Shi Kyonggi-Do, 463-020  
Tel: +82-2-556-1171 Fax: +82-2-555-2706  
www.kr.tdk-lambda.com

## MALAYSIA

TDK-Lambda Malaysia  
No.73, 7th Floor, Jaya Shopping Center,  
Jalan Semangat Section 14, 46100  
Petaling Jaya Selangor, D.E  
Tel: +60-3-7957-8800 Fax: +60-3-7958-2400  
www.my.tdk-lambda.com

## SINGAPORE

TDK-Lambda Singapore  
1008 Toa Payoh North # 06-01/08  
Singapore 318996  
Tel: +65-6251-7211 Fax: +65-6250-9171  
www.sg.tdk-lambda.com

## PHILIPPINES

## THAILAND

## INDIA

TDK-Lambda India  
New Bridge Business Centers  
No. 412, 2nd Floor, Jinal Center, 100 Feet Road,  
Kovamangala  
Bangalore, 560 034  
Tel: +91-80-64503815 Fax: +91-80-41467450  
www.in.tdk-lambda.com

## ISRAEL

Nemic Lambda Ltd.  
Kibbutz Givat Hashlosa Tel-Aviv 48800  
Tel: +972-3-9024-333 Fax: +972-3-9024-777  
E-mail: info@nemic.co.il  
www.nemic.co.il



TDK-Lambda Americas Inc. 405 Essex Road, Neptune, NJ 07753 USA  
Tel: +1 732 922 9300 Fax: +1 732 922 1441  
www.us.tdk-lambda.com/hp