



## Racal Instruments™

**3152B**

## VXI Precision PLL Waveform Synthesizer

The Racal Instruments™ 3152B Waveform Synthesizer combines 250 MS/s waveform generation performance, versatility, and compact size into a single-slot VXIbus format.

The 3152B is a greatly improved version of a field-proven instrument ideal for VXI test stimulus generation. It replaces the 3152A which is standard on many military and commercial test platforms.

**Key Features**

- Phase locks to external analog signals: 500 Hz to 10 MHz, 100 mV to 30 V<sub>rms</sub>
- Sine and square waves up to 50 MHz at amplitudes up to 16 V<sub>pk-pk</sub> into 50 Ω
- Built-in functions: Triangle(X), Sine(X), Sinc, Square, Ramp, Pulse, DC, Exponential & Gaussian Pulse
- Linear/log sweep features arbitrary and DDS) up to 100 MHz
- High-performance frequency synthesis: 11-digit resolution and 1 ppm accuracy
- VXI replacement for legacy pulse and function generators

**Product Information****Compatibility Mode**

The 3152B default operational mode is a compatibility mode which makes the 3152B accept and execute programming as though it were a 3152A for all modes including (and not limited to) PLL, PM, sequenced mode, trigger delay, and multi-module synchronization. The 3152B provides a front panel interface which is identical to that of the 3152A.

**Extended Performance Mode**

The extended performance mode of the 3152B provides a synergistic combination of a swept function generator, pulse generator, programmable sequencer, and arbitrary waveform synthesizer into one instrument. In addition, the 3152B integrates a phase lock loop, modulation, sweep, hopping (amplitude and frequency) and a high-performance frequency counter into a single-slot VXI module, saving valuable space.

**Frequency Sweep**

The 3152B sweeps sine (now using Direct Digital Synthesis or DDS), square or triangle waveforms between any two frequencies up to 100 MHz for sine or square, 16 MHz for triangle. Sweep may be performed either up or down and linearly or logarithmically.

**11-Digit Frequency Resolution**

The 3152B DDS frequency synthesizer (CW mode) provides high frequency resolution, high signal-to-noise ratio (70 dB, typical) and the low phase-noise and

jitter needed for telecommunications test applications.

**Phase Locking and Phase Modulation**

The 3152B incorporates external analog Phase Modulation (PM) and Phase Locking to external analog waveforms. The PM feature is useful in real-time phase offset control and telecom applications. The phase-lock feature automatically locks the 3152B's output to external signals at frequencies up to 10 MHz and voltages up to 30 V<sub>rms</sub>. Phase offset is programmable with 0.01° resolution, and the trigger threshold is programmable with 10 mV resolution.

**WaveCAD Compatible**

The 3152B is compatible with WaveCAD 3.4 (Figure 1) for the 3152 and 3152A, so you can continue to use this program if desired. The 3152 and 3152A VXIplug&play drivers are also compatible with the 3152B.

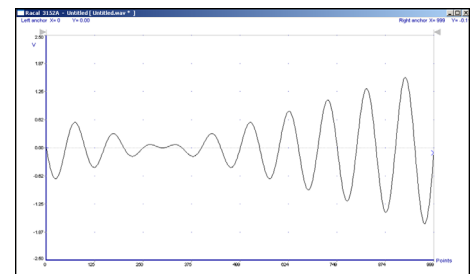


Figure 1: WaveCAD 3.4

**ArbConnection™ Software**

The 3152B is provided with ArbConnection™ software for control and waveform creation that lets you unlock the enhanced modes of the 3152B.

**ASTRONICS**  
TEST SYSTEMS

## Product Information

continued

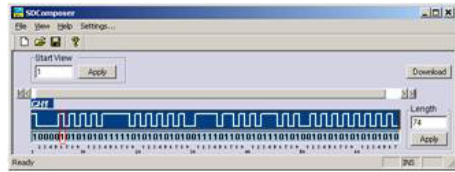


Figure 2: Serial Composer

The ArbConnection™ software includes composers to help you design arbitrary waveforms, pulse waveforms, frequency modulated waveforms, 3D waveforms (user-defined combinations of amplitude, frequency and phase modulation) and serial waveforms.

### Creating Arbitrary Waveforms

The ArbConnection™ software provides a Waveform Composer application which is useful for creating test stimuli for the 3152B. The Waveform Composer allows you to import waveforms from a scope, .csv or text file, choose from a variety of pre-defined waveforms, or to enter an equation. Any waveform can then be manually edited with a variety of tools.

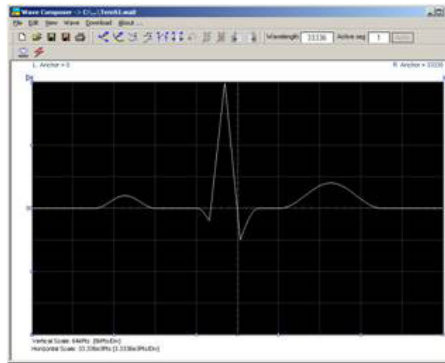


Figure 3: Cardiac Waveform in the Waveform Composer

### Creating Pulse Waveforms

The ArbConnection™ software also provides a Pulse Composer for the creation of arbitrary pulse trains. You can specify

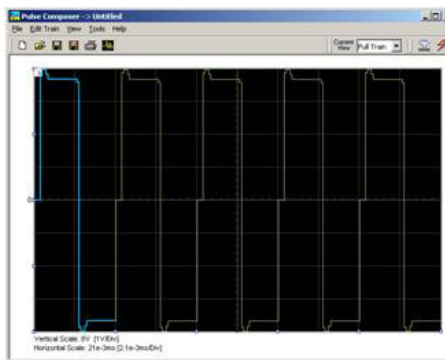


Figure 4: Custom Pulse Waveforms in the Pulse Composer

the characteristics of each pulse in terms of time, amplitude and repetitions. The ArbConnection™ software then “programs” the 3152B to create exactly the pulse that you need, saving you valuable time.

### Creating Modulated Waveforms

The 3D waveform composer allows you to selectively combine three types of modulation profiles, amplitude, frequency and phase, into one signal.

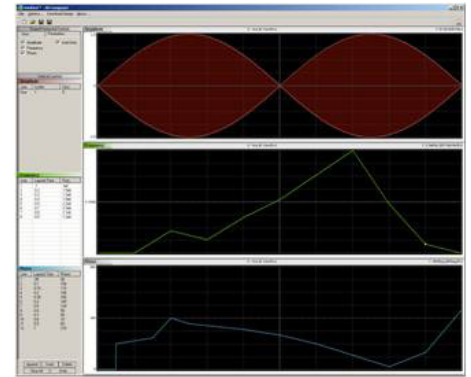


Figure 5: Combined AM, FM and Phase Modulation in 3D Composer

## Specifications

Note: The Astronics Test Systems policy is one of continuous development and improvement. Consequently, the equipment may vary in detail from the description and specifications in this publication.

### Amplitude Characteristics

#### Amplitude

- 20 mV to 32 V<sub>pk-pk</sub>, output open circuit
- 10 mV to 16 V<sub>pk-pk</sub>, into 50 Ω

#### Resolution

- 4 digits

#### Accuracy (at 1 kHz into 50 Ω)

- 1.6 V to 16 V<sub>pk-pk</sub>: ±(1% + 25 mV)
- 160 mV to 1.59 V<sub>pk-pk</sub>: ±(1% + 5 mV)
- 10 mV to 1.599 mV<sub>pk-pk</sub>: ±(1% + 2 mV)

#### DC Offset

- Range: 0 to ±7.995 V
- Resolution: 1 mV
- Accuracy: ±(1% ± 1% of Amp. ±5 mV)

#### Output Impedance

- 50 Ω ± 1%

#### Low-Pass Filters (selectable)

- 25 MHz: Bessel
- 50 MHz: Bessel
- 60 MHz: Elliptic
- 120 MHz: Elliptic

#### Standby (Output disconnected)

- Output On or Off

#### Output Protection

- Short circuit to case (10 s max)

### Standard Waveforms

(Sine, Triangle, Square, Pulse, Ramp, Noise, DC.)

#### Frequency Resolution

- 11 digits

#### Accuracy & Stability

- Same as frequency standard

#### Sine

#### Frequency Range

- 100 μHz to 100 MHz

#### Phase Adjustment

- Range: 0 to 359.95°
- Resolution: 0.05°

#### Power Range (sine raised to a power)

- 1 to 9

#### Total Harmonic Distortion

- <0.1% to 100 kHz, STD & CW

#### Harmonics & Spurious

| Frequency | <5 V <sub>pk-pk</sub> | <10 V <sub>pk-pk</sub> |
|-----------|-----------------------|------------------------|
| <100 MHz  | -35 dBc               | -30 dBc                |
| <10 MHz   | -50 dBc               | -35 dBc                |
| <1 MHz    | -50 dBc               | -40 dBc                |

#### Flatness

| Frequency | <5 V <sub>pk-pk</sub> | <10 V <sub>pk-pk</sub> |
|-----------|-----------------------|------------------------|
| <50 MHz   | 10%                   | 15%                    |
| <10 MHz   | 5%                    | 5%                     |
| <1 MHz    | 1%                    |                        |

# Specifications

continued

## Square

### Frequency Range

- 100  $\mu$ Hz to 100 MHz

### Duty Cycle Range

- 0% to 99.99%

### Rise/Fall Time (10%-90%)

- <5 ns

### Aberration

- <6%

## Triangle

### Frequency Range

- 100  $\mu$ Hz to 16 MHz

### Phase Adjustment

- Range: 0 to 359.95°
- Resolution: 0.05°

### Power Range (triangle raised to a power)

- 1 to 9

## Pulse and Ramp Functions

### Frequency Range

- 100  $\mu$ Hz to 16 MHz

### Delay, Rise/Fall Time, High Time Ranges

- 0% to 99.99% of period (each independently)

### Gaussian Pulse Time Constant Range

- 1 to 200

### Sinc Pulse “Zero Crossings” Range

- 4 to 100

### Exponential Pulse Time Constant Range

- -200 to 200

## DC Output Function

### Range

- -100% to 100% of amplitude

## Arbitrary Waveforms

### Waveform Creation Software

- Included ArbConnection™ software allows instrument control and creation of custom waveforms and sequences using freehand mode, equations, built-in functions or imported from a spreadsheet, scope or text file.

### Waveform Memory

- Legacy Mode: 512 k points
- Modern Mode: 1 Meg points

### Vertical Resolution

- Legacy Mode: 12-bits
- Enhanced Mode: 16-bits

### Number of Memory Segments

- 1 to 16 k

### Minimum Segment Size

- Legacy Mode: 10 points
- Enhanced Mode: 16 points

## Sequenced Waveforms

### Operation

- Segments may be linked and repeated in a user-selectable fashion to generate extremely long waveforms. Segments are advanced using either a command or a trigger.

### Advance Modes

- Automatic Sequence Advance

No trigger required to step from one segment to the next. Sequence is repeated continuously per a pre-programmed sequence table.

- Stepped Sequence Advance

Current segment is sampled continuously until a trigger advances the sequence to the next programmed segment and sample clock rate.

- Single Sequence Advance

Current segment is sampled the specified number of repetitions and then idles at the end of the segment. Next trigger samples the next segment the specified repeat count, and so on.

### Sequencer Steps

- 1 to 4096

### Segment Loops

- 1 to 1 Meg

### Minimum Segment Duration

- 500 ns

### Minimum Segment Size in a Sequence

- 10 points

## Sweep Waveforms

### Sweep Range

- Sine, square: 10 Hz to 100 MHz
- Triangle: 10 Hz to 16 MHz

### Swept Waveform

- Sine, square or triangle

### Spacing

- Linear or logarithmic

### Direction

- Up or Down

### Sweep Duration

- 1.4  $\mu$ s to 40 s

## Sampling Clock

### Internal Source Range (worst case)

- Continuous Mode: 100 mS/S to 250 MS/s
- Other Modes: 100 mS/s to 225 MS/s

### Internal Source Range (typical 25° C)

- Continuous Mode: 300 MS/s
- Other Modes: 240 MS/s

### Resolution

- 11 digits

### Accuracy and Stability

- Same as reference

## Reference Clock

### Internal Reference

- 10 MHz  $\pm$ 50 ppm

### Reference Clock

- CLK10: 100 ppm (typical)
- Internal TCXO: 1 ppm, 19° C to 29° C
- Drift: 1 ppm/year

## Operating Modes

### Normal Mode

- Continuous output of a single waveform segment

### Sequenced Mode

- Continuous or triggered output of a sequence of waveform segments (see Sequenced Waveforms)

### Sweep Mode

- Continuous output of a swept waveform

### Triggered Mode

- One waveform cycle or sequence or sweep is output

### Delayed Triggered Mode

- Delays any trigger by up to 2 million waveform points

### Gated Mode

- Generator is enabled when an external gate signal is active. The first gated output cycle is synchronous with the active slope of the gate signal. The last output cycle is always completed.

### Burst Mode

- A segment is repeated up to 1 million times. In External Burst Mode, each burst begins with a trigger. In Internal Burst Mode, an internal timer is used to repeat the burst at a programmed interval.

### Phase Lock Mode

- Phase locks a standard or arbitrary waveform to an external signal to 30  $V_{rms}$

### Phase Modulation (external)

- PM Modulation Rate: 0 to 10 kHz

# Specifications

continued

## Counter/Timer

- Measures frequency, period, period averaged, pulse width and events.

## Amplitude Modulation (internal)

- AM Carrier Range: 10 Hz to 100 MHz
- AM Rate: 10 mHz to 100 kHz
- AM Depth: 0% to 200%

## Triggering Characteristics

### Sources

- Internal: 1  $\mu$ s to 20 s, programmable
- External Input Impedance: 10 k $\Omega$  nominal
- Damage Level: 30  $V_{rms}$
- Level (Programmable):  $\pm 10$  V
- Resolution: 10 mV
- Sensitivity: 100 mV $_{rms}$
- VXI Backplane: TTLTRG0-7

### Maximum Trigger Frequency

- Internal Timer: 50 mHz to 1 MHz
- External: DC to 5 MHz

### External Trigger Pulse Width

- 10 ns, min

### Trigger Slope

- Positive or negative

### System Delay (Trig I/P to Waveform O/P)

- 150 ns + 6 clock periods

### Trigger Delay (Trig I/P to Waveform O/P)

- Legacy Mode: 10 to 2 Meg points
- Modern Mode: 100 ns to 20 s + system delay
- Resolution: 20 ns
- Accuracy: 5% of setting + system delay

### Re-trigger Delay (Waveform end to re-start)

- Resolution: 20 ns
- Accuracy: 20 ns + 3 clock periods + 5% of setting

### Sync Output

- Front Panel BNC: TTL
- VXI Backplane: TTLTRG0-7

### Sync Pulse

- Width Range: 4 to n - 8 clock periods
- Position Range: 0 to n (Where n is the number of points in the selected memory segment.)
- Resolution: 4 points

### Sync Sources

- Any point, sequence complete,  $\frac{1}{2}$  clock period

## PLL Characteristics

### Operation

- Automatically locks to external signal

### PLL Input Characteristics

- Same as TRIG IN

### External Lock Frequency Range

- STD Waveforms: 500 Hz to 10 MHz
- ARB Waveforms: 500 Hz to 100 MHz divided by # of points in segment

### Coarse Phase Offset Range

- $\pm 180^\circ$

### Fine Phase Offset Control

- Range:  $\pm 36^\circ$
- Resolution: 0.01 $^\circ$

### Phase Control Accuracy

- 2%  $\pm$ sample clock period

## Counter Characteristics

### Operation

- Counter/timer mode, when enabled, disables waveform generation

### Measurement Functions

- Frequency, period, period averaged, pulse width and totalize

### Input Characteristics

- Input BNC: Front panel TRIG/PLL IN
- Trigger Level Range:  $\pm 10$  V
- Sensitivity: 500 mV $_{pk-pk}$
- Damage Level:  $\pm 12$  V
- Slope: Positive or negative
- Minimum Pulse Width: 10 ns

### Frequency, Period Averaged

- Frequency: 20 Hz to 100 MHz
- Period: 10 ns to 50 ms
- Resolution: 7 digits/s

### Period, Pulse Width

- Range: 500 ns to 50 ms
- Resolution: 100 ns

### Totalize

- Frequency: 20 Hz to 100 MHz
- Event Counting Range: 1 to 10<sup>12</sup>-1

### Gate Time

- Frequency: 100  $\mu$ s to 1 s

### Reading Modes

- Repetitive: Continuous measurements when signal is present
- Hold: Single measurement on command
- Gated: Active in Gated Totalize mode

## PM Characteristics

### Operation

- External signal offsets phase. The PM input is operational in PLL mode.

### PM Input

- Impedance: 100 k $\Omega$ ,  $\pm 5\%$
- Phase Range:  $\pm 80^\circ$
- Input Bandwidth: 100 Hz to 10 kHz
- External Lock Range: Same as PLL
- Sensitivity: 20 $^\circ$ /V
- Accuracy:  $\pm 10\%$

## Multiple-Module Synchronization

(Multiple modules can be daisy-chained and synchronized to provide multi-channel systems. Master/slave phase is programmable.)

### Initial Skew

- $< \pm 75$  ns + 4 sample periods

### Synchronization Modes

- Waveform: STD, ARB, SEQ (auto advance only)
- Run: Continuous, triggered, gated, burst

### Inter-Module Phase Offsets

- Availability: Continuous run mode only
- Resolution & Accuracy: 20 ns
- Range:  $< 100$  ns to 20 s

### Synchronization Mechanism

- VXI LOCAL BUS

### Frequency Range for Operation

- STD Waveforms: 1.5 kHz to 100 MHz
- ARB/SEQ Waveforms: 2.5 MS/s to 150 MS/s (subject to backplane limits)

## Interface

(Single slot, Message Based, VXIbus 3.0 Compliant)

### Front Panel I/O

(Accessed with BNC connectors)

### Inputs

- TRIG/PLL IN: 10 k $\Omega$ ,  $\pm 10$  V
- CLOCK IN: NECL, 50  $\Omega$ ,  $\pm 5\%$
- PM IN: 100 k $\Omega$ , 30  $V_{rms}$  max

### Outputs

- OUTPUT: 50  $\Omega$ , 5.7  $V_{rms}$  (28 dBm)
- SYNC OUT: TTL

### General

### Status Lights

- Red: Fail
- Amber: Module accessed on VXIbus
- Amber: PLL Locked
- Green: Output on

## Specifications

continued

### Peak Current & Power Consumption

- Total Power: <25 Watts

|      | $I_{Pm}(A)$ | $I_{Dm}(A)$ |
|------|-------------|-------------|
| +24  | 0.116       | 0.03        |
| +12  | 0.07        | 0.011       |
| +5   | 1.74        | 0.014       |
| -2   | 0           | 0           |
| -5.2 | 1.8         | 0.15        |
| -12  | 0.06        | 0.01        |
| -24  | 0.112       | 0.01        |

### Software

#### Firmware Upgrades

- Stored in Flash using VXI utility

#### Drivers

- LabVIEW™, LabWindows™/CVI, VXI *plug&play* support for frameworks based on Microsoft Win32® application programming interface

#### Native Language

- SCPI 1993.0, IEEE 488.2

#### Waveform & Control Software

- WaveCAD 3.4, ArbConnection™ 4.2

#### Shared Waveform Memory

- D16/A24/A32 block transfer

### Environmental

#### Temperature

- Operating: 0° C to 55° C
- Storage: -40° C to 70° C

#### Humidity (non-condensing)

- 11° C to 30° C: 95% ±5%
- 31° C to 40° C: 75% ±5%
- 41° C to 50° C: 45% ±5%

#### Altitude

- Operating: 10,000 ft
- Storage: 15,000 ft

#### Vibration (non-operating)

- 2 g at 55 Hz

#### Shock (non-operating)

- 30 g, 11 ms, half sine pulse

#### MTBF (MIL-HDBK-217F 25C, GB, GC)

- 76,104 hrs

### Mechanical

#### Weight

- 2 lbs 9 oz (1.16 kg)

#### Cooling (10° C Rise)

- 3.7 l/s @ 0.5 mm H<sub>2</sub>O

**CE** The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions and Immunity to Electromagnetic Disturbances, and complies with European electrical safety standards.

## Ordering Information

#### 408151-001 : Racal Instruments™ 3152B

250 MS/s Waveform Generator with 1 M RAM & 1 ppm TCXO

#### 408151-011 : Racal Instruments™ 3152B

250 MS/s Waveform Generator with 1 M RAM & 1 ppm TCXO (3152 \*idn? response)

#### 408151-021 : Racal Instruments™ 3152B

250 MS/s Waveform Generator with 1 M RAM & 1 ppm TCXO (3152A \*idn? response)

#### 408151-201 : Racal Instruments™ 3152B

250 MS/s Waveform Generator with 1 M RAM & 1 ppm TCXO, TEK

## 3152/3152A Cross-Reference Guide

| Old Model                  | Old P/N         | New Model                  | New P/N    | Enhancements  |
|----------------------------|-----------------|----------------------------|------------|---|
| 3152 w/ 64 k               | 407510-001      | 3152B w/1 M, 1 ppm         | 408151-001 | Sample Rate/BW/memory are $\geq 2x$<br>Full legacy command emulation<br>New modulation/sweep capabilities<br>New waveform generation software |
| 3152 w/ 256 k              | 407510-002      |                            |            |   |
| 3152 w/ 512 k              | 407510-003      |                            |            |   |
| 3152 w/ 64 k, 1 ppm        | 407510-011      |                            |            |   |
| 3152 w/ 256 k, 1 ppm       | 407510-012      |                            |            |   |
| 3152 w/ 512 k, 1 ppm       | 407510-013      |                            |            |   |
| 3152A w/ 64 k              | 407808-001      |                            |            |   |
| 3152A w/ 512 k             | 407808-003      |                            |            |   |
| 3152A w/ 64 k, 1 ppm       | 407808-011      |                            |            |   |
| 3152A w/ 512 k, 1 ppm      | 407808-013      |                            |            |   |
| 3152A w/ 512 k, TEK        | 407808-203      | 3152B w/1 M, 1 ppm, TEK    | 408151-201 |   |
| 3152A w/ 512 k, 1 ppm, TEK | 407808-213      |                            |            |   |
| 3152 w/ 512 k, 1 ppm       | 407510-213      | 3152B w/ 1 M, 1 ppm        | 408151-301 |   |
| 3152A w/ 512 k, 1 ppm      | 407808-413      | 3152B w/ 1 M, 1 ppm        | 408151-401 |   |
| 3152-S-1755                | 407510-003S1755 | 3152B w/ 1 M, 1 ppm, S1755 | 408151-501 | Specials are fully incorporated in the standard unit. If legacy special ID codes are required, contact marketing.                             |
| 3152-S-1619                | 407510-001S1619 | 3152B w/ 1 M, 1 ppm, S1619 | 408151-601 |   |
| 3152-S-1619A               | 407510013S1619A |                            |            |   |

All trademarks and service marks used in this document are the property of their respective owners.

- Racal Instruments is a trademark of Astronics Test Systems Inc. in the United States and/or other countries
- Microsoft and Win32 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries
- LabVIEW and LabWindows are trademarks of National Instruments in the United States and/or other countries
- ArbConnection is either trademark or registered trademark of Tabor Electronics

