

Test Leads and Probes


TEST LEADS AND PROBES SELECTOR GUIDE

MODEL	NAME	USE WITH:
1600A	High Voltage Probe	DMMs
1651	50-Ampere Shunt	DMMs
1681	Clip-On Test Lead Set	DMMs
1751	Safety Test Leads	All DMMs, Series 2400
1752	Premium Safety Test Lead Kit	All DMMs, Series 2400
1754	Safety Universal Test Lead Kit	All DMMs, Series 2400
2187-4	Test Lead Kit	2182A, 622x Current Sources
2600-BAN	Banana Test Leads/Adapter Cable	2601, 2602
5804	General-Purpose, 4-Terminal Test Lead Set	580, Series 2400, 2750, DMMs
5805	Kelvin Probes, 0.9m (3 ft)	580, Series 2400, 2750, DMMs
5805-12	Kelvin Probes, 3.6m (12 ft)	580, Series 2400, 2750, DMMs
5806	Kelvin Clip Leads	580, Series 2400, 2750, DMMs
5807-7	Helical Spring Point Test Leads, 2.1m (7 ft)	580, Series 2400, 2750, DMMs
6517-RH	Humidity Probe with Extension Cable	6517A
6517-TP	Thermocouple Bead Probe	6517A
7401	Thermocouple Wire Kit, 30m (100 ft), Type K	2001-TCSCAN, 7057A, 7700, 7706, 7708
8605	High Performance Modular Test Leads	All DMMs, Series 2400
8606	High Performance Modular Probe Kit	All DMMs, Series 2400
8681	Low Cost RTD	2001, 2002, 2010 DMMs (with 8680)
CA-109A	Test Lead Set for Output Connections	2000-SCAN, 2001-SCAN, 2001-TCSCAN




Model 1752 Premium Safety Test Lead Kit: Includes two banana leads with safety shrouds on both ends, two fully insulated alligator clips, two fully insulated needle probes, and two spring-action clip-on probes with safety blocks, in a carrying case.

For use with: All DMMs, Series 2400 SourceMeter Instruments

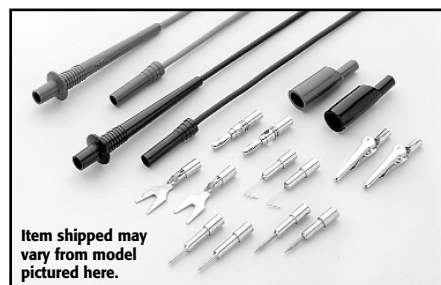

Model 1754 Universal Test Lead Kit: 10-piece test lead kit with interchangeable plug-in accessories. Kit includes: 1 set of test leads, 91.4cm (36 in), 1 red and black; 2 spade lugs, 2 standard banana plugs, 2 hooks, and 2 miniature alligator clips with boots.

For use with: All DMMs, Series 2400 SourceMeter Instruments

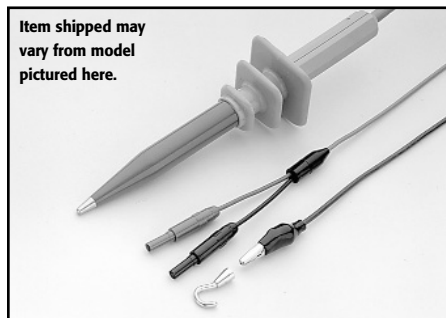


Item shipped may vary from model pictured here.

Model 1600A High Voltage Probe

MAXIMUM INPUT: 40kV DC or peak AC to 300Hz.
INPUT RESISTANCE: 1000MΩ.
DIVISION RATIO: 1000:1 (into 10MΩ).


For use with: DMMs

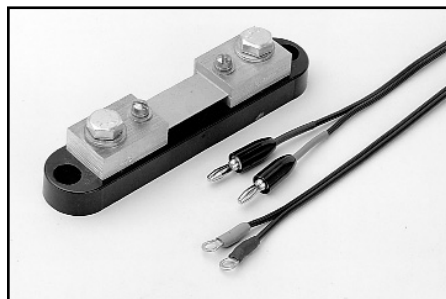

Model 1651 50 Ampere Shunt: External 0.001Ω ± 1%, 4-terminal shunt; extends current measuring capability of Keithley DMMs to 50A.

CABLE LENGTH: 1.4m (56 in).


For use with: DMMs

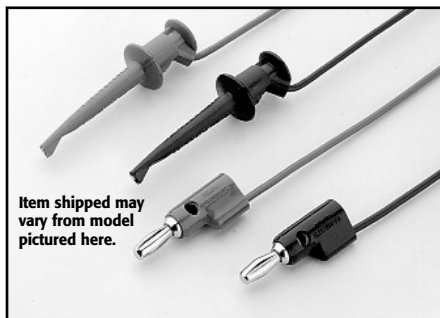

Item shipped may vary from model pictured here.

Model 1681 Clip-On Test Lead Set: Two 1.2m (48 in) leads terminated with banana plugs and spring action clip-on probes.

For use with: DMMs

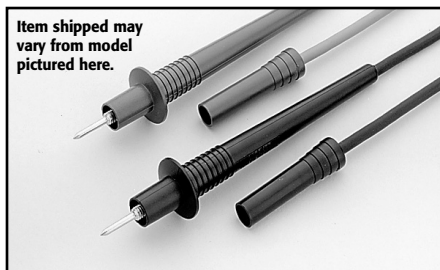

Item shipped may vary from model pictured here.

Model 1751 Safety Test Leads: 91.4cm (36 in) test lead set supplied with each Model 175A and 197A. Finger guards and shrouded banana plugs help minimize the chance of making contact with live circuitry.

For use with: All DMMs, Series 2400 SourceMeter® Instruments

1.888.KEITHLEY (U.S. only)

www.keithley.com




Test Leads and Probes




Model 2187-4 Test Lead Kit: Includes an input cable with banana terminations, banana extensions, sprung-hook clips, alligator clips, needle probes, and spade lugs to connect the Model 2182A to virtually any DUT. The kit is also used to connect the Model 2182A directly to the Model 622X guard to improve response time for pulsed measurements or to reduce errors when measuring high impedance devices.

For use with: 2182A, 6220, 6221

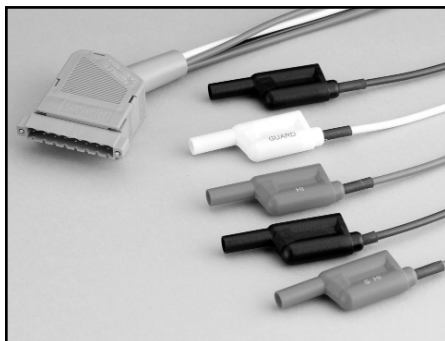

Model 2600-BAN: 1m (3.3 ft) banana test leads/adaptor cable for a single Series 2600 SourceMeter channel (two needed for use with Model 2602). Provides safety banana connections to Hi, Sense Hi, Lo, Sense Lo, and guard.


For use with: 2601, 2602

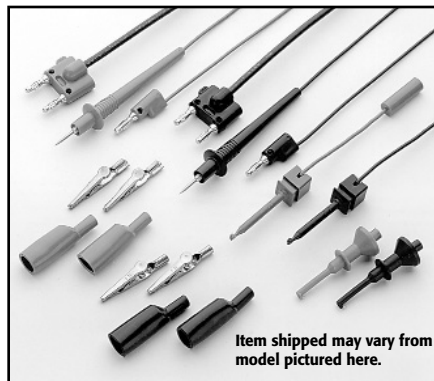

Item shipped may vary from model pictured here.

Model 5804 Test Lead Set: Designed to be used with Keithley instruments that measure 4-terminal resistance. Contains: 2 test leads, 0.9m (36 in), red and black; 2 test clips, red and black; 2 plunger clip adapters, red and black; 2 alligator clips with boots (accept standard test probe tip); 2 alligator clips with boots (barrels accept standard banana plugs).


For use with: 580, Series 2400 SourceMeter® Instruments, 2750, DMMs

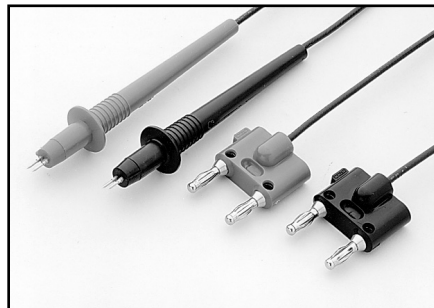

Model 5805 Kelvin Probes: 2 spring-loaded test probes, red and black, 0.9m (36 in) with banana plug termination. Designed to be used with Keithley instruments that measure 4-terminal resistance and in-circuit current. 1/8-in spacing between pin tips. A package of 8 replacement contacts (P/N CS-551) is available.

Model 5805-12: Similar to 5805 but 3.6m (12 ft) in length.

For use with: 580, Series 2400 SourceMeter Instruments, 2750, DMMs

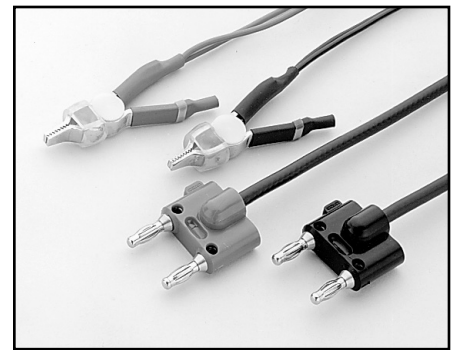

Model 5806 Kelvin Clip Lead Set: 2 clip test leads, red and black, 0.9m (36 in) with banana plug termination. Designed to be used with Keithley instruments that measure 4-terminal resistance. Maximum jaw opening 1/2 in. A package of 8 replacement elastic bands (P/N 5806-306B) is available.

For use with: 580, Series 2400 SourceMeter Instruments, 2750, DMMs



Model 5807-7 Helical Spring Point Test Leads: Two excellent Kelvin test probes for Keithley instruments that measure 4-terminal resistance. The probes have pointed tips that rotate when pressure is exerted on the handle. Good contact is assured, and the handle can be held at any angle to the measurement surface. The lead wires terminate in banana jacks. **Lead wire length:** 2m (7 ft).

For use with: 580, Series 2400 SourceMeter Instruments, 2750, DMMs

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE


Test Leads and Probes



Model 6517-RH Humidity Probe: The 6517-RH comes with a 3m (10 ft) extension cable and is designed to be used with the 6517A Electrometer. The 6517-RH measures the relative humidity of the testing environment.

OPERATING TEMPERATURE RANGE: -10°C to $+60^{\circ}\text{C}$
 OPERATING HUMIDITY RANGE: 0 to 100% RH
 MEASURING RANGE: 10 to 90% RH
 TEMPERATURE DEPENDENCE: $<\pm 2\%$ from -10°C to $+60^{\circ}\text{C}$

For use with: 6517A Electrometer

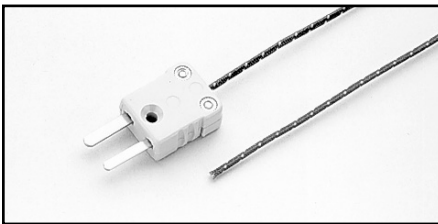

Model 6517-TP Thermocouple Bead Probe: Designed to be used with the 6517A Electrometer, the 6517-TP measures the temperature of the testing environment. 6517-TP is 36 in. long and has a temperature calibration (range) of 0°C to 1250°C .

For use with: 6517A Electrometer




Model 7401: Type K thermocouple wire kit includes 30.5m (100 ft) of type K (chromel-alumel) thermocouple wire.

For use with: 2001-TCSCAN, 7057A, 7700, 7706, 7708



Model 8605 High Performance Modular Test Leads: Highest quality lead with silicone insulation, and removable test probes. Rated to 1500V UL listed. **Length:** 1m (3.3 ft).


For use with: All DMMs, Series 2400 SourceMeter® Instruments

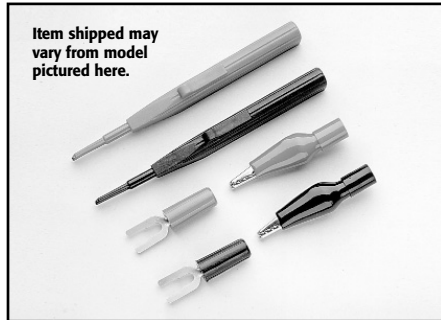

Item shipped may vary from model pictured here.

Model 8606 High Performance Modular Probe Kit: For use with Model 8605 High Performance Modular Test Leads. Contains 2 each spade lugs, alligator clips, and retractable hooks.


For use with: All DMMs, Series 2400 SourceMeter Instruments

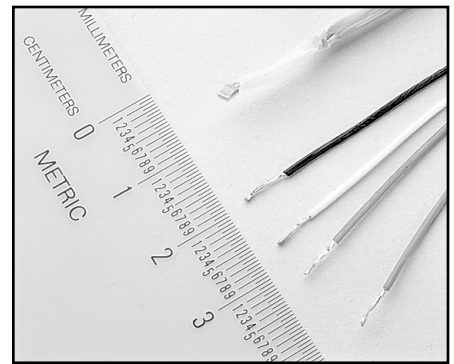

Model 8681 Low Cost RTD: This inexpensive RTD has small size (0.09 in \times 0.09 in) and fast thermal response time. 100Ω , $0.385\%/^{\circ}\text{C}$ element. Meets or exceeds DIN 43760-1980-A, IEC 751:1983-A, BS1904: 1984-A, and JIS C1604-1981-0.2. Can be used with Model 8680 RTD Input Probe Adapter. Measures from -200° to $+600^{\circ}\text{C}$.

LENGTH: 0.9m (3 ft).
 ACCURACY: $\pm(0.15^{\circ}\text{C} + 0.002 \times |t|)^{\circ}\text{C}$, where $|t|$ is absolute value of temperature in $^{\circ}\text{C}$.

For use with: 2001, 2002, 2010 DMMs (with 8680), 7700, 7702, 7706, 7708

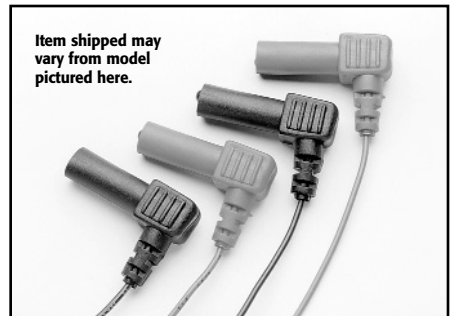

Item shipped may vary from model pictured here.

Model CA-109A Test Lead Set: For output connections (two red, two black).

For use with: 2000-SCAN, 2001-SCAN, 2001-TCSCAN

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY