

Handheld Spectrum Analyzer R&S® FSH

R&S® FSH3 100 kHz to 3 GHz

R&S® FSH6 100 kHz to 6 GHz



First Edition May 2004



ROHDE & SCHWARZ

Spectrum analysis anywhere, anytime – on earth and in space

The R&S®FSH is the ideal spectrum analyzer for rapid, high-precision, cost-effective signal investigations. It provides a large number of measurement functions and so can handle anything from the installation or maintenance of a mobile radio base station up to on-site fault location in RF cables as well as development and service – an extensive range of applications.

Due to its excellent characteristics, the R&S®FSH3 is used on board the International Space Station (ISS) for distance-to-fault measurements on RF antenna cables.



Handy, robust and portable

The R&S®FSH has been designed as a robust, portable spectrum analyzer that can be used in the field.

- Trace
- Memory Trace
- Clear/Write
- Max/Min Hold
- Average
- View
- Detectors
 - Auto Peak
 - Sample
 - Max/Min Peak
 - RMS

Function keys

Softkey function

**Robust edge protection,
stable carrying handle**

Easy operation

Four hours operating time on battery power

Storage of up to 100 traces and setups

Easy data transfer to PC

High measurement accuracy

Best RF characteristics in this class

The R&S®FSH can, of course, also be used on the lab bench. The R&S®FSH has an adjustable, fold-out stand to position the instrument to an optimal display viewing angle.



The R&S®FSH and its accessories can be stored and transported in the compact and sturdy aluminium transit case.



Selection of measurement functions:

- Spectrum analysis
- Scalar network analysis
- Vector network analysis
- Receiver mode
- Channel power
- TDMA power
- Occupied bandwidth
- DTF
- Power
- Transducer factors
- Limit lines
- Display line

Selection of following functions:

- Marker
- Delta marker
- Noise marker
- Frequency counter
- Multimarker

- Memory for up to 100 traces and setups
- Direct printout of measurement results

Colour display with 320×240 pixel, switchable to monochrome display for high-contrast display when used in direct sunlight in the field

RS-232-C optical interface

Simple menu-based operation via softkeys

General instrument setups

Current instrument setting

Rotary knob

Default setting

Cursor keys

AC power supply connector

Generator output, N connector

Power sensor connector

Trigger input/
external reference input

RF input, N connector



Data in brief

Headphones connector

	R&S®FSH3	R&S®FSH6
Frequency range	100 kHz to 3 GHz	100 kHz to 6 GHz
Resolution bandwidths	1 kHz to 1 MHz (model .13) 100 Hz to 1 MHz (models .03 and .23)	100 Hz to 1 MHz
Video bandwidths	10 Hz to 1 MHz	
Displayed average noise level	typ. -114 dBm (1 kHz) (model .13) typ. -135 dBm (100 Hz) (models .03 and .23)	typ. -135 dBm (100 Hz)
TOI	typ. 13 dBm	
SSB phase noise	<-100 dBc (1 Hz) at 100 kHz from carrier	
Detectors	sample, max/min peak, auto peak, RMS	
Level measurement uncertainty	<1.5 dB, typ. 0.5 dB	
Reference level	-80 dBm to +20 dBm	
Dimensions	170 mm × 120 mm × 270 mm	
Weight	2.5 kg	

R&S® FSH – options and applications

The R&S®FSH is available as 3 GHz and 6 GHz models either with or without an internal tracking generator. When the tracking generator is included, the R&S®FSH can be used for distance-to-fault (DTF) measurements, scalar and vector network analysis, and one-port cable loss measurement. Almost all models come standard with an adjustable preamplifier, making them suitable for measuring very small signals. Two power sensors are available as accessories – one for high-precision terminating power measurements up to 8 GHz or 18 GHz and one for directional power measurements up to 4 GHz. The following tables show possible configurations for various applications and an overview of available models.

Product	Application	TDMA power measurements	Channel-power measurements	Field-strength measurements	Receiver mode	Power measurements up to 8 GHz/18 GHz	Directional power measurements up to 4 GHz	Measurements on cables (distance-to-fault)	Scalar transmission measurements	Vector transmission measurements ¹⁾	Scalar reflection measurements ¹⁾	Vector reflection measurements ¹⁾	Remote control via RS-232-C interface	One-port cable loss measurements
R&S®FSH (models .03/.06) with preamplifier	■	■	■	■	+R&S® FSH-K3	+R&S® FSH-Z1/-Z18	+R&S® FSH-Z44	–	–	–	+R&S® FSH-K1	–		
R&S®FSH (model .13) with tracking generator	■	■	■	■	+R&S® FSH-K3	+R&S® FSH-Z1/-Z18	+R&S® FSH-Z44	+R&S® FSH-Z2 +R&S® FSH-B1	■	+R&S® FSH-Z2	+R&S® FSH-K1	+R&S® FSH-Z2 +R&S® FSH-K2		
R&S®FSH (models .23/.26) with tracking generator and preamplifier	■	■	■	■	+R&S® FSH-K3	+R&S® FSH-Z1/-Z18	+R&S® FSH-Z44	+R&S® FSH-Z2 +R&S® FSH-B1	■	+R&S® FSH-Z2	+R&S® FSH-K1	+R&S® FSH-Z2 +R&S® FSH-K2		


¹⁾ R&S®FSH-K2 required
 ■ R&S®FSH standard function
 – Not available

R&S® FSH – models

	Frequency range	Tracking generator	Output power of tracking generator	Preamplifier	Resolution bandwidth
R&S®FSH3 model .03	100 kHz to 3 GHz	–	–	■	100 Hz to 1 MHz
R&S®FSH3 model .13	100 kHz to 3 GHz	■	–20 dBm	–	1 kHz to 1 MHz
R&S®FSH3 model .23	100 kHz to 3 GHz	■	–20 dBm/0 dBm selectable	■	100 Hz to 1 MHz
R&S®FSH6 model .06	100 kHz to 6 GHz	–	–	■	100 Hz to 1 MHz
R&S®FSH6 model .26	100 kHz to 6 GHz	■	–10 dBm (f < 3 GHz) –20 dBm (f > 3 GHz)	■	100 Hz to 1 MHz


TDMA power measurements

By means of the TDMA POWER function, the R&S®FSH performs time-domain power measurements within a timeslot of TDMA (time division multiple access) methods. All the settings required for the GSM and EDGE standards are predefined on the R&S®FSH to make these measurements easier for the user.

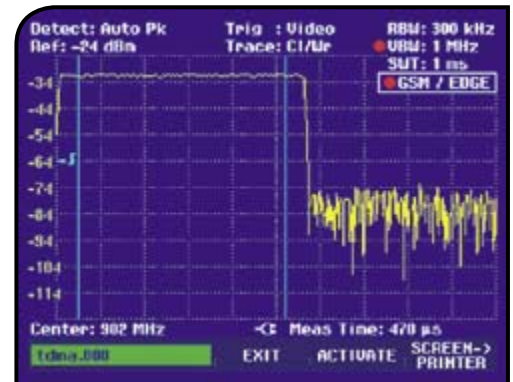

Channel-power measurements

The R&S®FSH determines the power of a definable transmission channel by means of the channel-power measurement function. A channel-power measurement for the digital mobile radio standards 3GPP WCDMA, cdmaOne and cdma2000 1x is performed at a keystroke with all the correct instrument settings.

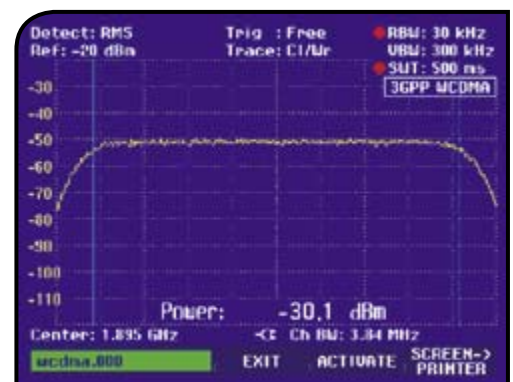


Field-strength measurements

When measuring electric field strength, the R&S®FSH takes into account the specific antenna factors of the connected antenna. Field strength is displayed directly in dBμV/m. In addition, frequency-dependent loss or gain of, for example, a cable or an amplifier can be corrected. For quick and easy result analysis, the R&S®FSH provides two user-definable limit lines with automatic limit monitoring.

R&S®FSH with Active Directional Antenna R&S®HE200 (optional accessory)


Receiver mode

When equipped with the option R&S®FSH-K3, the R&S®FSH can be operated as a receiver for monitoring and precompliance EMC applications. Measurements are performed at a predefined frequency with a user-selectable measurement time. In the scan mode, the R&S®FSH sequentially measures each level at various frequencies defined in a channel table. The channel tables are generated with the R&S®FSH View software and loaded into the R&S®FSH. For a few TV transmitter and mobile radio standards, the tables are predefined. In addition, the CISPR bandwidths 200 Hz, 9 kHz, 120 kHz and 1 MHz are available for RFI emission measurements. The R&S®FSH offers peak, average, RMS and quasi-peak detectors.

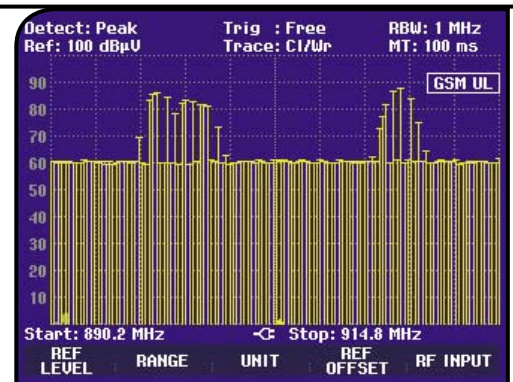

Power measurements

The Power Sensors R&S®FSH-Z1 and R&S®FSH-Z18 expand the R&S®FSH to a high-precision RF power meter up to 8 GHz and 18 GHz respectively. As with thermal sensors, the true RMS value of the measured signal is obtained over the entire measurement range of -67 dBm to +23 dBm irrespective of the signal waveform. In particular with modulated signals, additional measurement errors can thus be prevented, and handling becomes easy.

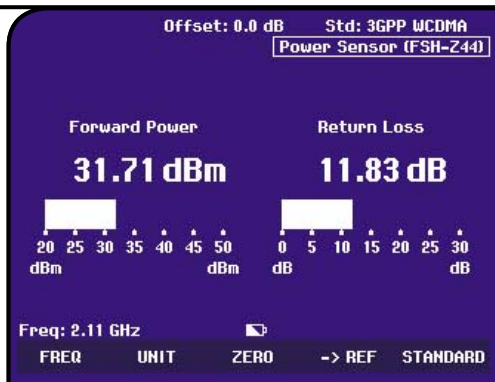



Directional power measurements

The Directional Power Sensor R&S®FSH-Z44 turns the R&S®FSH into a full-featured directional power meter between 200 kHz and 4 GHz. With this added functionality, it is simultaneously possible to measure the output power and the matching of transmitter system antennas under operating conditions. The directional power sensor measures power up to 120 W and as a rule eliminates the need for any extra attenuators. It is compatible with the common standards GSM/EDGE, 3GPP WCDMA, cdmaOne, cdma2000 1x, DVB-T and DAB.

Measurements on cables (distance-to-fault)

For rapid and accurate determination of the distance to any faults in an RF cable. Distance-to-fault measurements using the VSWR Bridge R&S®FSH-Z2 give an immediate overview of the state of the device under test (return loss and distance, see figure). The marker-zoom function allows detailed analysis of faults with a resolution of up to 1024 pixels.

Only applies to the R&S®FSH with tracking generator and installed options R&S®FSH-B1 (distance-to-fault measurement) and R&S®FSH-Z2 (VSWR bridge and power divider)

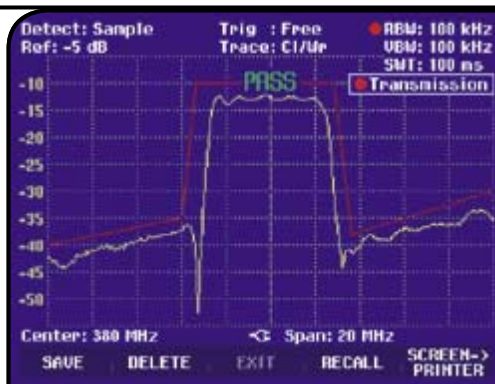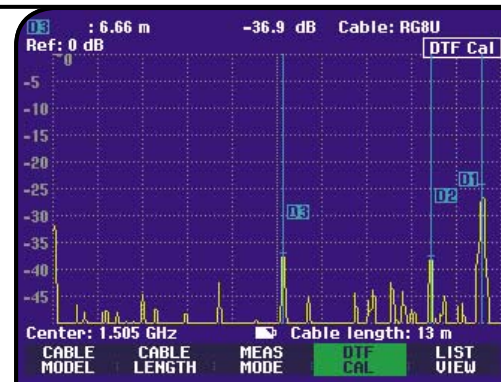

Scalar transmission and reflection measurements with VSWR bridge (R&S®FSH-Z2 as accessory)

The R&S®FSH with built-in tracking generator rapidly determines the transmission characteristics of cables, filters, amplifiers, etc, with a minimum of effort. When the VSWR Bridge R&S®FSH-Z2 (10 MHz to 3 GHz) is installed, the R&S®FSH can also determine the matching (return loss or VSWR) of an antenna, for example. The bridge is screwed directly onto the R&S®FSH's RF input and tracking generator output without involving cumbersome, extra cabling.




Vector transmission and reflection measurements

Compared to scalar measurements, the optional R&S®FSH-K2 vector measurement significantly increases measurement accuracy and dynamic range for transmission and reflection measurements. This is possible because the receive signal is analyzed with respect to magnitude and phase. After calibration, complex correction of the system errors can be effected by the R&S®FSH. To allow detailed analysis of the matching of, for example, an antenna, the magnitude and phase are displayed in a Smith chart. A user-definable limit line comes in handy when evaluating the measurement results.

One-port cable loss measurements

The R&S®FSH with tracking generator and VSWR bridge can determine the cable loss of previously installed long cables without much effort. One end of the cable is connected to the VSWR bridge, and the other end is terminated with a short circuit or simply left open. The calculated cable loss represents the average value within the displayed frequency range. The loss at specific frequencies is determined via markers. The one-port cable loss measurement is only available with the option R&S®FSH-K2.

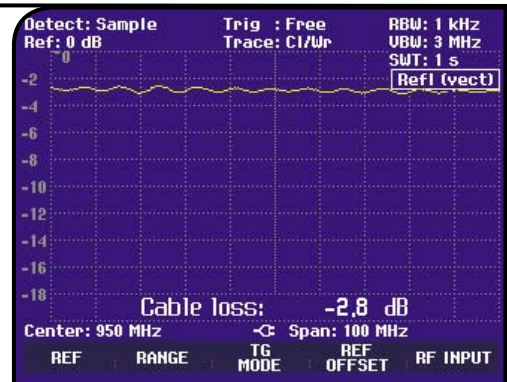

R&S®FSH with Directional Power Sensor
R&S®FSH-Z44



Data transfer between R&S®FSH and PC
(interface cables and software are supplied with the instrument)




R&S®FSH with VSWR Bridge and
Power Divider R&S®FSH-Z2



Control Software R&S® FSH View

The powerful software package for documenting your measurements is supplied with every R&S® FSH.

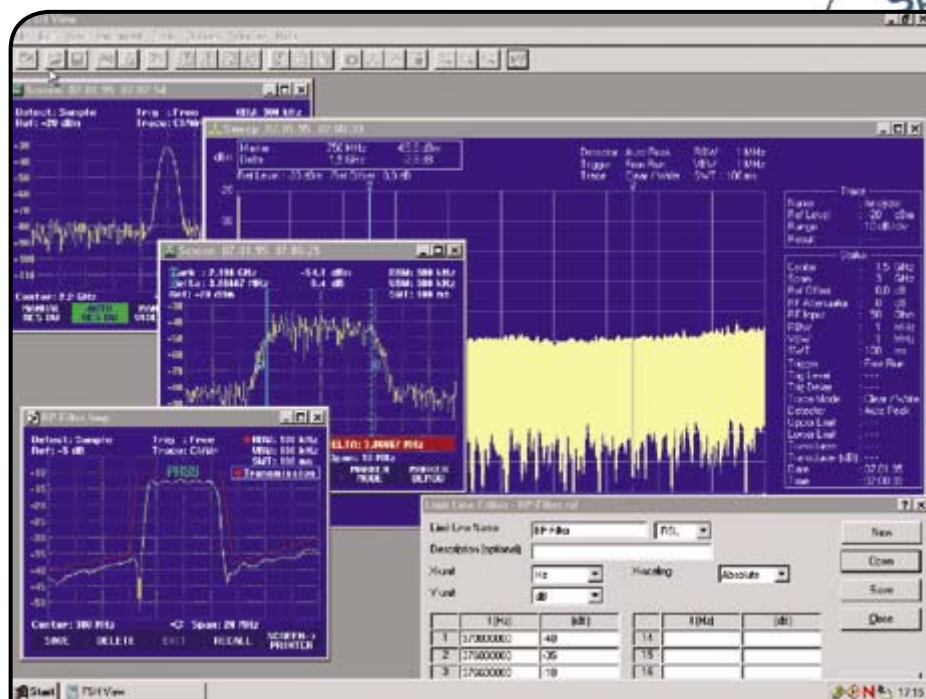

Features:

- Runs under Windows 98/ME/NT/2000/XP
- Rapid and simple transfer of measurement data from the R&S® FSH to a PC and vice versa
- Data export in ASCII or MS Excel format
- Printout of all relevant data via Windows (screenshot of the R&S® FSH display for documentation)
- Graphics data stored in standard formats (.bmp, .pcx, .png, .wmf)
- Permanent and continuous transfer of sweeps to the PC; facilities for subsequent analysis (markers, zoom, etc)
- Storage space for traces and measurement data as well as for comparisons of current and previous measurements (available space is limited only by the size of the hard disk of the controlling PC)
- Automatic storage of measurement results at selectable intervals
- Generation of cable data with a built-in cable editor; downloading to the R&S® FSH for distance-to-fault measurements (R&S® FSH-B1)
- Editor for the generation of limit lines, transducer factors and correction factors for external attenuators or amplifiers
- Generation of channel lists and uploading to the R&S® FSH for the receiver mode (R&S® FSH-K3)
- Macro function for Word for fast and easy documentation of measurement results
- Connection between PC and R&S® FSH via interference-free, RS-232-C optical interface

Specifications

Specifications are valid under the following conditions: 15 minutes warm-up time at ambient temperature, specified environmental conditions met and calibration cycle adhered to. Data without tolerances: typical values. Data designated as "nominal": design parameters, i. e. not tested.

		R&S®FSH3	R&S®FSH6
Frequency			
Frequency range		100 kHz to 3 GHz	100 kHz to 6 GHz
Reference frequency			
Aging		1 ppm/year	
Temperature drift	0 °C to 30 °C 30 °C to 50 °C	2 ppm in addition 2 ppm/10 °C	
Frequency counter			
Resolution		1 Hz	
Counter accuracy	S/N > 25 dB	± (frequency × reference frequency error)	
Frequency span		0 Hz, 10 kHz to 3 GHz	0 Hz, 10 kHz to 6 GHz
Spectral purity			
SSB phase noise	f = 500 MHz, 20 °C to 30 °C		
30 kHz from carrier		<85 dBc (1 Hz)	
100 kHz from carrier		<100 dBc (1 Hz)	
1 MHz from carrier		<120 dBc (1 Hz)	
Sweep time			
	span = 0 Hz	1 ms to 100 s	
	span > 0 Hz	20 ms to 1000 s, min. 20 ms/600 MHz	
Bandwidths			
Resolution bandwidths (–3 dB)	1145.5850.13	1, 3, 10, 30, 100, 200, 300 kHz, 1 MHz	
	1145.5850.03/.23, 1145.5850.06/.26	in addition 100 Hz, 300 Hz	
Tolerance	≤300 kHz	±5 %, nominal	
	1 MHz	±10 %, nominal	
Resolution bandwidths (–6 dB)	with option R&S®FSH-K3 installed	in addition 200 Hz, 9 kHz, 120 kHz, 1 MHz	
Video bandwidths		10 Hz to 1 MHz in 1, 3 steps	

		R&S®FSH3	R&S®FSH6
Amplitude			
Display range		average noise level displayed to +20 dBm	
Maximum permissible DC voltage at RF input		50 V/80 V ¹⁾	
Maximum power		20 dBm, 30 dBm (1 W) for max. 3 minutes	
Intermodulation-free dynamic range	third-order IM products, 2 × –20 dBm, reference level = –10 dBm	typ. 66 dB (typ. +13 dBm third-order intercept, IP3)	
Displayed average noise level	resolution bandwidth 1 kHz, video bandwidth 10 Hz, reference level ≤ –30 dBm		
10 MHz to 3 GHz		<–105 dBm, typ. –114 dBm	<–105 dBm, typ. –112 dBm
3 GHz to 5 GHz		–	<–103 dBm, typ. –108 dBm
5 GHz to 6 GHz		–	<–96 dBm, typ. –102 dBm
With preamplifier	only models 1145.5850.03 ²⁾ , 1145.5850.23, 1145.5850.06 and 1145.5850.26		
10 MHz to 2.5 GHz		<–120 dBm, typ. –125 dBm	<–120 dBm, typ. –125 dBm
2.5 GHz to 3 GHz		<–115 dBm, typ. –120 dBm	<–115 dBm, typ. –120 dBm
3 GHz to 5 GHz		–	<–115 dBm, typ. –120 dBm
5 GHz to 6 GHz		–	<–105 dBm, typ. –110 dBm
Inherent spurious	reference level ≤ –20 dBm, f > 30 MHz, RBW ≤ 100 kHz	<–80 dBm	<–80 dBm
Input related spurious	mixer level –40 dBm, carrier offset > 1 MHz		
Up to 3 GHz		<–70 dBc (nominal)	<–70 dBc (nominal)
3 GHz to 6 GHz		–	<–64 dBc (nominal)
Signal frequency minus –2.0156 GHz for signal frequencies 2 GHz to 3.2 GHz		typ. <–55 dBc	typ. <–55 dBc
2nd harmonic	mixer level –40 dBm	typ. <–60 dBc	typ. <–60 dBc
Level display			
Reference level		–80 dBm to +20 dBm in steps of 1 dB	
Display range		100 dB, 50 dB, 20 dB, 10 dB, linear	
Display units			
Logarithmic		dBm, dBμV, dBmV	
Linear		with transducer also dBμV/m and dBμA/m	
		μV, mV, V, nW, μW, mW, W	
		with transducer also V/m, mV/m and μV/m	
Traces		1 trace and 1 memory trace	
Detectors		auto peak, maximum peak, minimum peak, sample, RMS	
	with option R&S®FSH-K3 installed	in addition average and quasi-peak	
Level measurement error	frequency > 1 MHz, at reference level down to –50 dB, 20 °C to 30 °C	<1.5 dB, typ. 0.5 dB	


¹⁾ 80 V valid as of serial number 100900 (model 1145.5850.03) or 101600 (model 1145.5850.13); models 1145.5850.23, 1145.5850.06 and 1145.5850.26 all serial numbers.

²⁾ As of serial number 101362.


		R&S®FSH3		R&S®FSH6	
Markers					
Number of markers or delta markers		max. 6			
Marker functions		peak, next peak, minimum, center = marker frequency, reference level = marker level, all markers to peak			
Marker displays		normal (level), noise marker, frequency counter (count)			
Trigger		free-running, video, external			
Audio demodulation		AM (video voltage without AGC) and FM			
Inputs					
RF input		N female			
Input impedance		50 Ω			
VSWR	10 MHz to 3 GHz 10 MHz to 6 GHz	typ. 1.5 –	– typ. 1.5		
Trigger/external reference input		BNC female, selectable			
Trigger voltage		TTL			
Reference frequency		10 MHz			
Required level	from 50 Ω	10 dBm			
Outputs					
AF output		3.5 mm mini jack			
Output impedance Open-circuit voltage		100 Ω adjustable up to 1.5 V			
Tracking generator	only models 145.5850.13, 1145.5850.23 and 1145.5850.26				
Frequency range		5 MHz to 3 GHz	5 MHz to 6 GHz		
Output level	model 1145.5850.13 model 1145.5850.23 model 1145.5850.26 f < 3 GHz f > 3 GHz	–20 dBm (nominal) 0 dBm/–20 dBm, selectable	–10 dBm (nominal) –20 dBm (nominal)		
Output impedance		50 Ω, nominal			
Interfaces					
RS-232-C optical interface					
Baud rate		1200, 2400, 9600, 19200, 38400, 57600, 115200 baud			
Power sensor		7-contact female connector (type Binder 712)			

		R&S®FSH3	R&S®FSH6
Accessories			
Power Sensors R&S®FSH-Z1 and R&S®FSH-Z18			
Frequency range			
R&S®FSH-Z1		10 MHz to 8 GHz	
R&S®FSH-Z18		10 MHz to 18 GHz	
VSWR			
10 MHz to 30 MHz		<1.15	
30 MHz to 2.4 GHz		<1.13	
2.4 GHz to 8 GHz		<1.20	
8 GHz to 18 GHz		<1.25	
Maximum input power	average power peak power (<10 μs, 1 % duty cycle)	400 mW (+26 dBm) 1 W (+30 dBm)	
Measurement range		200 pW to 200 mW (–67 dBm to +23 dBm)	
Signal weighting		average power	
Effect of harmonics		<0.5 % (0.02 dB) at harmonic ratio of 20 dBc	
Effect of modulation		<1.5 % (0.07 dB) for continuous digital modulation	
Absolute measurement uncertainty	sine signals, no zero offset		
10 MHz to 8 GHz	15 °C to 35 °C 0 °C to 50 °C	<2.5 % (0.11 dB) <4.5 % (0.19 dB)	
8 GHz to 18 GHz	15 °C to 35 °C 0 °C to 50 °C	<3.5 % (0.15 dB) <5.2 % (0.22 dB)	
Zero offset after zeroing		<150 pW	
Dimensions (W × H × D)		48 mm × 31 mm × 170 mm, connecting cable 1.5 m	
Weight		<0.3 kg	
Directional Power Sensor R&S®FSH-Z44			
Frequency range		200 MHz to 4 GHz	
Power measurement range		30 mW to 120 W (300 W with unmodulated envelope)	
VSWR referenced to 50 Ω			
200 MHz to 3 GHz		<1.07	
3 GHz to 4 GHz		<1.12	
Power-handling capacity	depending on temperature and matching (see diagram below)	120 W to 1000 W	
Insertion loss			
200 MHz to 1.5 GHz		<0.06 dB	
1.5 GHz to 4 GHz		<0.09 dB	
Directivity			
200 MHz to 3 GHz		>30 dB	
3 GHz to 4 GHz		>26 dB	
Signal weighting		average power	
Measurement uncertainty	sine signals, 18 °C to 28 °C, no zero offset		
200 MHz to 300 MHz		4 % of measured value (0.17 dB)	
300 MHz to 4 GHz		3.2 % of measured value (0.14 dB)	

		R&S®FSH3	R&S®FSH6
Zero offset	after zeroing	± 4 mW	
Range of typical measurement error with modulation FM, PM, FSK, GMSK AM (80 %) cdmaOne, DAB 3GPP WCDMA, cdma2000 DVB-T $\pi/4$ -DQPSK	if standard is selected on R&S®FSH	0 % of measured value (0 dB) ± 3 % of measured value (± 0.13 dB) ± 1 % of measured value (± 0.04 dB) ± 2 % of measured value (± 0.09 dB) ± 2 % of measured value (± 0.09 dB) ± 2 % of measured value (± 0.09 dB)	
Temperature coefficient 200 MHz to 300 MHz 300 MHz to 4 GHz		0.40 %/K (0.017 dB/K) 0.25 %/K (0.011 dB/K)	
Matching measurement range		0 dB to 23 dB	
Return loss		0 dB to 20 dB	
VSWR		> 1.15	
200 MHz to 3 GHz		> 1.22	
3 GHz to 4 GHz			
Minimum forward power	specs met from 0.2 W	0.03 W	

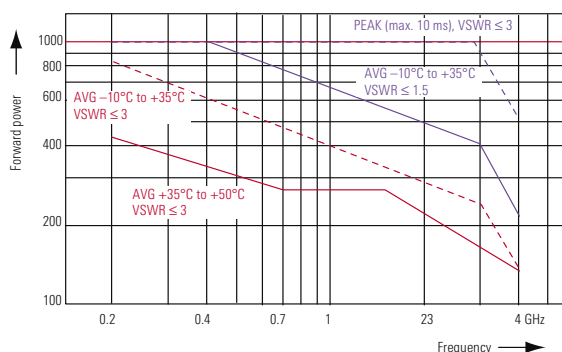

Power-handling capacity

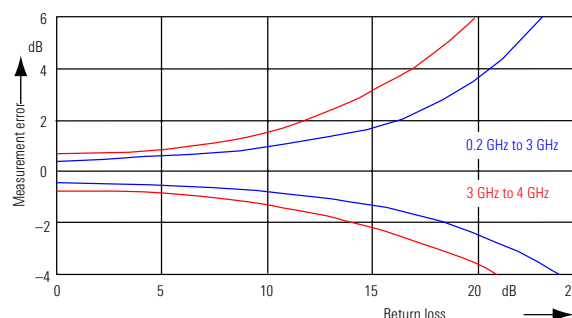


Limits of measurement error for matching measurements


Dimensions (W × H × D)	120 mm × 95 mm × 39 mm, connecting cable 1.5 m
Weight	0.65 kg

		R&S®FSH3	R&S®FSH6
VSWR Bridge and Power Divider R&S®FSH-Z2			
Frequency range		10 MHz to 3 GHz	
Impedance		50 Ω	
VSWR bridge			
Directivity 10 MHz to 1 GHz 1 GHz to 3 GHz		typ. 30 dB typ. 25 dB	
Directivity, corrected 10 MHz to 3 GHz	option R&S®FSH-K2	typ. 43 dB	
Return loss at test port		typ. 20 dB	
Return loss, corrected	option R&S®FSH-K2	typ. 35 dB	
Insertion loss		typ. 9 dB	
Power divider			
Return loss at test port		typ. 20 dB	
Connectors			
Generator input/RF output		N male	
Test port		N female	
Control interface		7-contact connector (type Binder)	
Calibration standards			
Short/open		N male	
50 Ω load		N male	
Impedance		50 Ω	
Return loss	up to 3 GHz	>43 dB	
Power-handling capacity		1 W	
General data			
Power consumption		500 mW (nominal)	
Dimensions (W × H × D)		169 mm × 116 mm × 30 mm	
Weight		485 g	
Distance-to-Fault Measurement R&S®FSH-B1 (only model 1145.5850.13, 1145.5850.23 or 1145.5850.26)			
Display		301 pixels	
Maximum resolution, distance to fault	maximum zoom	cable length/1023 pixels	
Display range Return loss VSWR	with option R&S®FSH-K2	10, 5, 2, 1 dB/div, linear 1 to 2 and 1 to 6 in addition 1 to 1.2 and 1 to 1.5	
Cable length	depending on cable loss	3 m to max. 1000 m	
Maximum permissible spurious signal		1st mixer 1 dB compression point typ. +10 dBm IF overload at reference level typ. +8 dB	

		R&S®FSH3	R&S®FSH6
Transmission measurements (only with R&S®FSH3 models 1145.5850.13, 1145.5850.23 and R&S®FSH6 model 1145.5850.26)			
Frequency range		5 MHz to 3 GHz	5 MHz to 6 GHz
Dynamic range			
10 MHz to 2.2 GHz	scalar mode	typ. 60 dB	typ. 80 dB
	vector mode, option R&S®FSH-K2	typ. 80 dB	typ. 90 dB
2.2 GHz to 3 GHz	scalar mode	typ. 50 dB	typ. 70 dB
	vector mode, option R&S FSH-K2	typ. 65 dB	typ. 85 dB
3 GHz to 5 GHz	scalar mode	—	typ. 40 dB
	vector mode, option R&S®FSH-K2	—	typ. 55 dB
5 GHz to 6 GHz	scalar mode	—	typ. 35 dB
	vector mode, option R&S®FSH-K2	—	typ. 50 dB
Reflection measurements (only with R&S®FSH3 model 1145.5850.13 or 1145.5850.23, R&S®FSH6 model 1145.5850.26 and R&S®FSH-Z2)			
Frequency range		10 MHz to 3 GHz	10 MHz to 3 GHz
Display range of return loss		10, 20, 50, 100 dB, selectable	
VSWR display range		1 to 2 and 1 to 6, selectable, with option R&S®FSH-K2 also 1 to 1.2 and 1 to 1.5	
Measurement uncertainty		see diagrams	

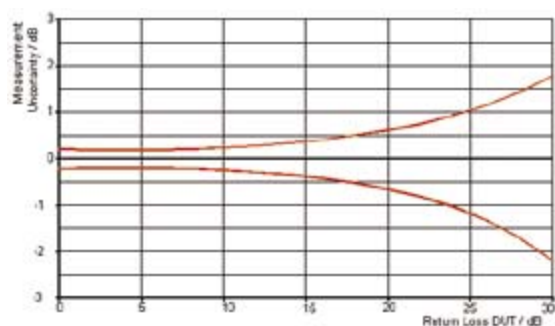



Measurement uncertainty with vector measurements,
(option R&S®FSH-K2)

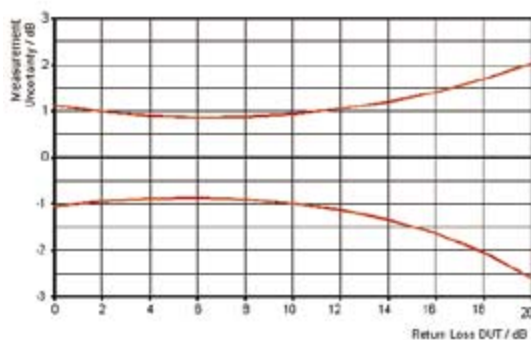

Measurement uncertainty with scalar measurements

	General data	
	Display	14 cm (5.7") LC colour display
	Resolution	320 × 240 pixels
	Memory Settings and traces	CMOS RAM 100
	Environmental conditions	
	Temperature	
	Operating temperature range R&S®FSH powered from internal battery R&S®FSH powered from AC power supply	0 °C to 50 °C 0 °C to 40 °C
	Storage temperature range	−20 °C to +60 °C
	Battery charging mode	0 °C to 40 °C
	Climatic conditions	
	Relative humidity	95 % at 40 °C (EN 60068)
	IP class of protection	51
	Mechanical resistance	
	Vibration, sinusoidal	complies with EN 60068-2-1, EN 61010-1 5 Hz to 55 Hz: max 2 g, 55 Hz to 150 Hz: 0.5 g constant, 12 minutes per axis
	Vibration, random	complies with EN 60068-2-64, 10 Hz to 500 Hz, 1.9 g, 30 minutes per axis
	Shock	complies with EN 60068-2-27, 40 g shock spectrum
	RFI suppression	complies with EMC directive of EU (89/336/EEC) and German EMC legislation
	Immunity to radiated interference Level display at 10 V/m (reference level ≤−10 dBm) Input frequency IF Other frequencies	10 V/m <−75 dBm (nominal) <−85 dBm (nominal) < displayed noise level
	Power supply	
	AC supply	plug-in AC power supply (R&S®FSH-Z33) 100 V AC to 240 V AC, 50 Hz to 60 Hz, 400 mA
	External DC voltage	15 V to 20 V
	Internal battery	NiMH battery, type Fluke BP190 (R&S®FSH-Z32)
	Battery voltage	6 V to 9 V
	Operating time with fully-charged battery	4 h with tracking generator off, 3 h with tracking generator on
	Lifetime	300 to 500 charging cycles
	Power consumption	typ. 7 W
	Safety	complies with EN 61010-1, UL 3111-1, CSA C22.2 No. 1010-1
	Test mark	VDE, GS, CSA, CSA-NRTL
	Dimensions (W × H × D)	170 mm × 120 mm × 270 mm
	Weight	2.5 kg

Accessories and ordering information

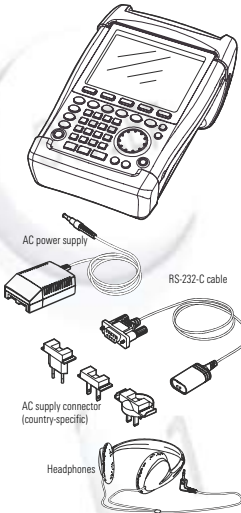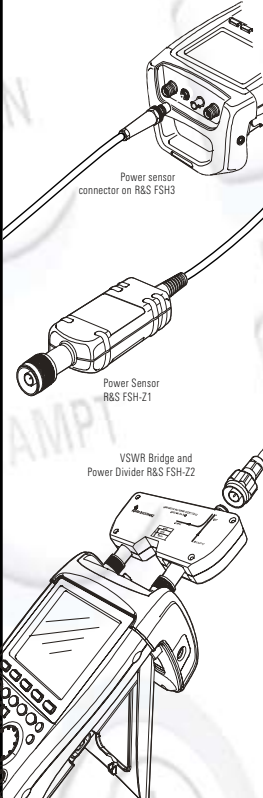	Ordering information		
	Designation	Type	Order No.
	Handheld Spectrum Analyzer, 100 kHz to 3 GHz, with preamplifier	R&S®FSH3	1145.5850.03
	Handheld Spectrum Analyzer, 100 kHz to 3 GHz, with tracking generator	R&S®FSH3	1145.5850.13
	Handheld Spectrum Analyzer, 100 kHz to 3 GHz, with tracking generator and preamplifier	R&S®FSH3	1145.5850.23
	Handheld Spectrum Analyzer, 100 kHz to 6 GHz, with preamplifier	R&S®FSH6	1145.5850.06
	Handheld Spectrum Analyzer, 100 kHz to 6 GHz, with tracking generator and preamplifier	R&S®FSH6	1145.5850.26
	Accessories supplied External power supply, battery pack (built-in), RS-232-C optical cable, headphones, Quick Start manual, CD-ROM with Control Software R&S®FSH View and documentation		
	Options		
	Designation	Type	Order No.
Distance-to-Fault Measurement (includes 1 m cable, R&S®FSH-Z2 required)	R&S®FSH-B1	1145.5750.02	
Remote Control via RS-232-C	R&S®FSH-K1	1157.3458.02	
Vector Transmission and Reflection Measurements	R&S®FSH-K2	1157.3387.02	
Receiver Mode	R&S®FSH-K3	1157.3429.02	
	Optional accessories		
	Designation	Type	Order No.
	Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
	VSWR Bridge and Power Divider, 10 MHz to 3 GHz (open, short, 50 Ω load)	R&S®FSH-Z2	1145.5767.02
	Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
	Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
	Matching Pad 50/75 Ω, 0 Hz to 2700 MHz	R&S®RAZ	0358.5714.02
	Spare RF Cable (1 m), connectors N male/N female for R&S®FSH-B1	R&S®FSH-Z20	1145.5867.02
	12 V Car Adapter	R&S®FSH-Z21	1300.7579.02
	Serial/Parallel Converter	R&S®FSH-Z22	1145.5880.02
	Carrying Bag	R&S®FSH-Z25	1145.5896.02
	Transit case	R&S®FSH-Z26	1300.7627.00
	Combined Short/Open and 50 Ω Load for VSWR and DTF calibration	R&S®FSH-Z29	1300.7504.02
	Spare Short/Open Calibration Standard for R&S®FSH-Z2 for VSWR calibration	R&S®FSH-Z30	1145.5773.02
	Spare 50 Ω Load Standard for R&S®FSH-Z2 for VSWR and DTF calibration	R&S®FSH-Z31	1145.5780.02
	Spare Battery Pack	R&S®FSH-Z32	1145.5796.02
	Spare AC Power Supply	R&S®FSH-Z33	1145.5809.02
	Spare RS-232-C Optical Cable	R&S®FSH-Z34	1145.5815.02
	Spare CD-ROM with Control Software R&S®FSH View and documentation	R&S®FSH-Z35	1145.5821.02



More information at
www.fsh.rohde-schwarz.com
Rohde & Schwarz direct: Tel. (+49 2203) 807-800
Fax (+49 2203) 807-66
E-mail: Direct@rohde-schwarz.com



www.rohde-schwarz.com